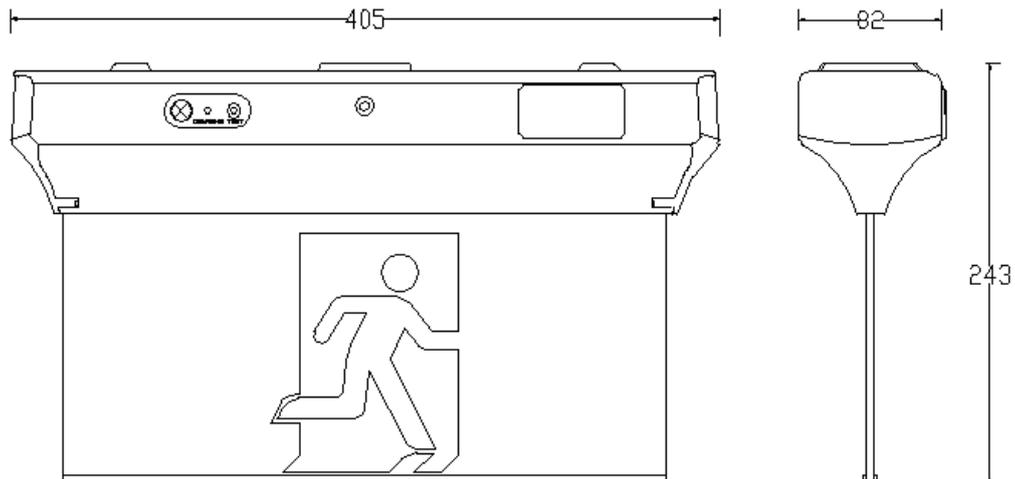# Simple (Blade) Exit Light

MODEL: EX4LEDQE

FEATURES

- PC+ABS light body.
- Suits 24m viewing distance.
- LED with a long life over 50000 hours energy-saving and environment friendly.
- Quick connect bracket for ceiling mounting.
- Three years full warranty on the complete fitting.
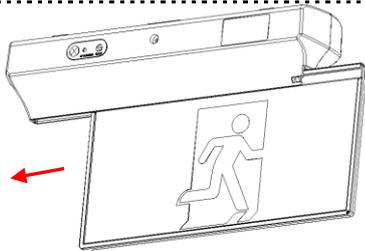- Dimension (L x W x H):405x82x243mm.

Tel: 1300 WBS LED(927 533)
Fax: 02 8580 4689

Page   1

Sydney office: Unit 32, 2 Slough Ave, Silverwater NSW 2128
Melbourne office: unit 66, 170 Forster Rd, Mt Waverley VIC 3149

SPECIFICATIONS

NAME	RATED VALUE	UNIT
Supply Voltage	AC220-240	V
Supply Frequency	50	Hz
Power	6	W
Power Factor	0.55	
Ra	≥70	
Charge Time	16	Hours
Discharge Time	2	Hours
Ingress Protection Rating	IP20	
LED Lamp Life	50,000	Hours

Tel: 1300 WBS LED(927 533)
Fax: 02 8580 4689

Page   2

Sydney office: Unit 32, 2 Slough Ave, Silverwater NSW 2128
Melbourne office: unit 66, 170 Forster Rd, Mt Waverley VIC 3149
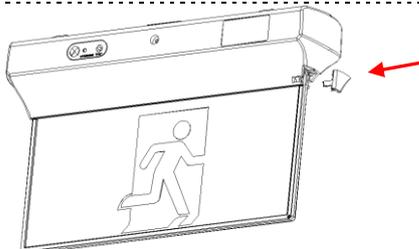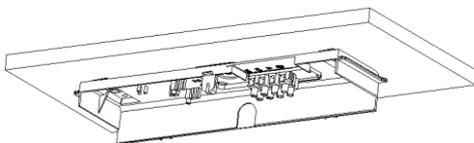
INSTALLATION INSTRUCTIONS
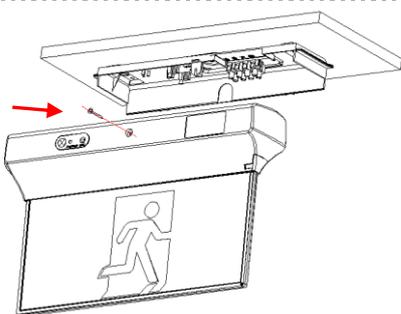
EXRUN

RXARROW

Choose the signage as need, insert it to the box body

Fix base cover into the base body

Install the Base plate on the wall or on the ceiling first.
Connect the Mains cable to the 4 ports connector.

Fix the Base body with spare screw

Tel: 1300 WBS LED(927 533)
Fax: 02 8580 4689

Page   3

Sydney office: Unit 32, 2 Slough Ave, Silverwater NSW 2128
Melbourne office: unit 66, 170 Forster Rd, Mt Waverley VIC 3149

Tel: 1300 WBS LED(927 533)
Fax: 02 8580 4689   Page   4

Sydney office: Unit 32, 2 Slough Ave, Silverwater NSW 2128
Melbourne office: unit 66, 170 Forster Rd, Mt Waverley VIC 3149