

Installation Manual




Notes

1. Product must be installed in accordance with the current regulations and electrical codes of Australia and all wiring must be done by a qualified electrician.
2. These products are designed for connection to a 180-305V AC 50/60Hz supply.
3. Any broken or damaged parts should be replaced as soon as possible.
4. Always disconnect power before installation or servicing.
5. Mondolux will not accept responsibility for any claims arising from a poor installation.

Installation Steps

1. Make sure you have all the tools and accessories required to complete the installation correctly.
2. For Suspension, insert and secure the hanger hook into the installation carrier (ceiling of the facility).
3. Hang one end of the safety chain (not supplied) on to the hanger hook from the ceiling. Adjust the safety chain to specified length.
4. Click and lock the other end of the safety chain into the luminaire's circular ring to complete the installation.
5. For Surface Mount, affix the mounting bracket (not supplied) to the luminaire and screw it into the ceiling.
6. Connect the mains input cable as indicated in below diagram using a suitable connector/junction box to maintain the IP rating of the connection.
7. Installation is complete.
8. Please see fig A, B, C under Accessory Installation section to install the reflectors.

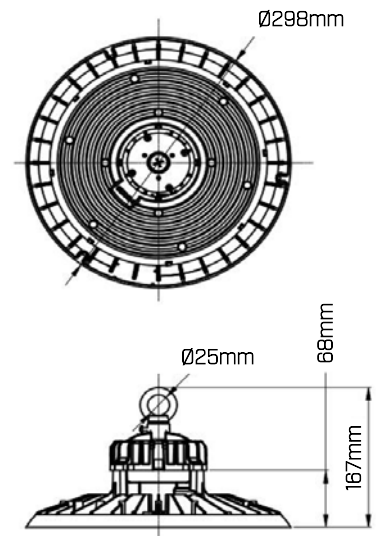


Wiring Instructions

180 - 305VAC 50/60Hz / Class I

Non-Dimmable

Dimmable (Optional)



Note: Class I products must always be Earthed/Grounded

<p>Installation Types</p> <p>Suspended</p> <p>Surface Mounted</p>	<p>Accessories installation</p> <p>Aluminium Reflector</p> <p>FIG. A</p> <p>FIG. B</p> <p>FIG. C</p>																		
<p>Selectable Power</p> <table border="1"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>150W</td> </tr> <tr> <td>●</td> <td>○</td> <td>○</td> <td>120W</td> </tr> <tr> <td>○</td> <td>●</td> <td>○</td> <td>100W</td> </tr> <tr> <td>○</td> <td>○</td> <td>●</td> <td>80W</td> </tr> </table> <p>Max. 150W</p>	1	2	3	150W	●	○	○	120W	○	●	○	100W	○	○	●	80W	<p>PC Reflector</p> <p>FIG. A</p> <p>FIG. B</p> <p>FIG. C</p>		
1	2	3	150W																
●	○	○	120W																
○	●	○	100W																
○	○	●	80W																
<p>Selectable CCT</p> <p>5000K 4000K 3000K COLOR TEMPERATURE</p>																			