



AMALFI "C"

Modular electric oven for pizzeria

COMPOSITION WITH 2 BAKING CHAMBERS



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- Leavening prover on wheels, height 800mm
- Support with wheels, height 600mm
- Support with wheels, height 800mm
- Additional tray holder guides for compartment and support
- Suction hood

(WITHOUT SURCHARGE)

- Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- Structure made in folded stainless steel
- Side panels in pre-painted sheet metal
- Stainless steel hood with aluminised steel top cover
- Front vapour collection hood in enameled steel sheet
- Steam duct in stainless steel plate
- Stainless steel door with bottom hinge and spring balance
- Tempered glass element
- Handles in thermoplastic material
- Control panel on front right hand side

INTERNAL CONSTRUCTION

- Refractory brick cooking surface
- Refractory top and side structure
- Rock wool heat insulation

FUNCTIONING

- Heated by spiral heating elements
- Electronic temperature management with independent adjustment of ceiling and floor
- Maximum temperatura reached 450°C
- Continuous temperature monitoring with thermocouple
- Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- Lighting with halogen lamp
- Timer
- Economiser
- Independent maximum temperature safety device
- 20 customisable programs



MORETTI FORNI S.P.A.

www.morettiforni.com

marketing@morettiforni.com


Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA
Tel. +39.0721.96161 - Fax +39.0721.9616299



AMALFI "C"

2 baking chambers height 18cm

(assembled with support height 800mm)

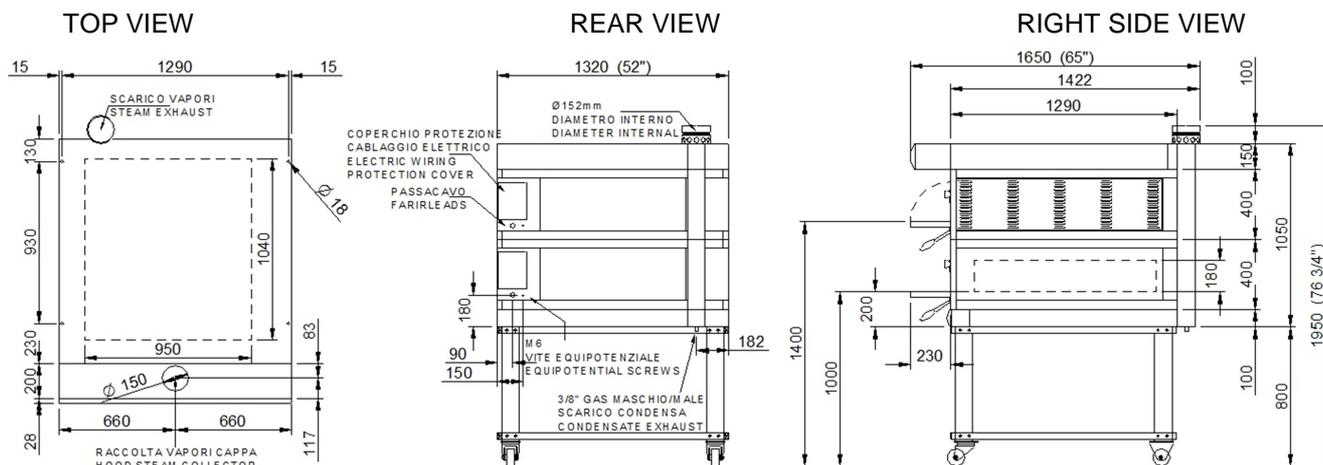

Nota: The dimensions indicated in the views are in millimetres.

SPECIFICATIONS

The appliance comprises two independent cooking elements and an optional leavening compartment or support. The oven cooking surface is made of refractory, allowing perfect heat distribution over the whole surface and making this oven particularly suitable for use by pizza cooks. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 2 baking chambers

DIMENSIONS

External height
 External depth
 External width
 Weight
 Baking surface

1150mm
 1651mm
 1320mm
 466kg
 2m²

SHIPPING INFORMATION

Packed in wooden crate
 Height
 Depth
 Width
 Weight

1300mm
 1851mm
 1520mm
 (466+60)kg

FEEDING AND POWER

Standard feeding
 A.C. V400 3N
Feeding on request
 A.C. V230 3
 Frequency 50/60Hz
 Max power 19,2kW
 * Average power cons 9,6kWh
 Connecting cable for each chamber type H07RN-F
 5x4mm² (V400 3N)
 4x6mm² (V230 3)
 Power supply (optional prover)
 A.C. V230 1N 50/60 Hz
 Max power 1,5kW
 * Average power cons 0,8kWh
 Conn. Cable type H07RN-F
 3x1,5mm²

TOTAL BAKING CAPACITY

Tray (600x400)mm
 Pizza diameter 300mm
 Pizza diameter 450mm

When combined with leavening compartment or support:
 Max height 2250mm
 Max weight (574+70)kg

6
 18
 8

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice