


Guidelines:

1. Apply a suitable sealant to the underside of the sink flange/rim.
2. Place the sink into the bench top opening.
3. Insert the Screw (2) through the bracket (1) by approximately 5mm.
4. Slide the Bracket (1) fully into the bowl wall slot.
5. Repeat step “b” for all clips.
6. Ensure the sink is in the centre of the opening.
7. Rotate the Screws(2) by a phillips-head screw driver until all clips are firmly up against underside of the bench, and then retighten in an opposed diagonal pattern.

CAUTION: Only tighten until the sink is securely against the bench. Don't use tools to tighten screws as this could damage the sink or benchtop.

Inset Sink Installation Clip Set

Code: ICM

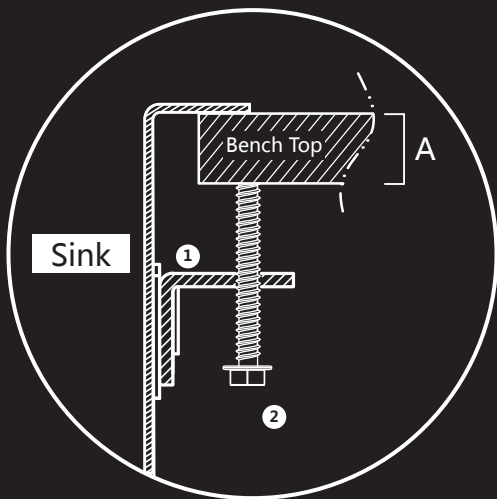

1



Bracket

2



Screw