WALL BASIN/ BATH SET INSTALLATION INSTRUCTIONS

abey

Abey Australia Pty Limited 57-81 Abey Road Cobblebank 3338 PHONE: 03 9747 7777

Water Supply Requirements

To ensure optimum performance and customer satisfaction please adhere to the following:

- Maximum hot water temperature 80°C.
- Recommended minimum working pressure 150kPa.
- Recommended maximum working pressure 500kPa.


If the water pressure exceeds or is likely to exceed 500kPa, an approved pressure limiting valve must be fitted.


- Flush out all pipe work prior to installation.
- If the water temperature exceeds 80°C an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.


Failure to comply with the above may void all warranties.

Maintenance and Care


Do not use cleaning agents containing a corrosive acid or scouring agent. Do not use cream cleaners, as they are abrasive. Surfaces should only be cleaned with a cloth and clear water of mild liquid detergent. Use of unsuitable cleaning agents may damage the surface.

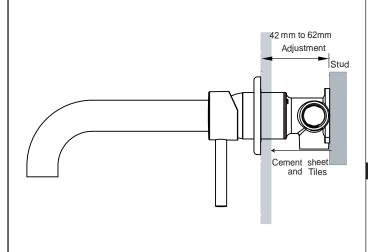








Do not remove the protective



Test and check for leaks





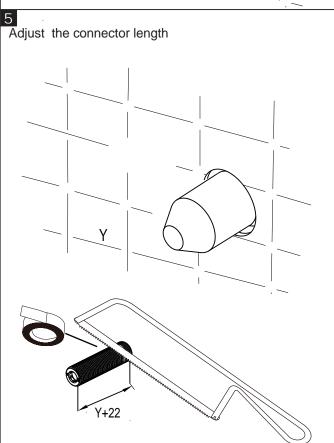

WALL BASIN/ BATH SET INSTALLATION INSTRUCTIONS



Abey Australia Pty Limited 57-81 Abey Road Cobblebank 3338 PHONE: 03 9747 7777

