

Installation Instructions

FULL WALL FACED TOILET SUITE

Note:

- ★ DO NOT SUBMERGE THE HOSE ASSEMBLY INTO WATER.
- ★ THE PAN CONNECTORS, STOP TAP AND FLEXIBLE HOSES SHOWN IN THIS INSTALLATION INSTRUCTION ARE FOR REFERENCE ONLY, THE WATER CLOSET PROVIDED FROM US ARE WITHOUT THESE ACCESSORIES, PLEASE CUSTOMER PURCHASE THE CERTIFIED ACCESSORIES FOR DIFFERENT MARKETS.

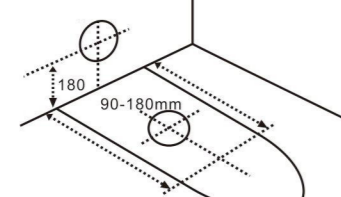
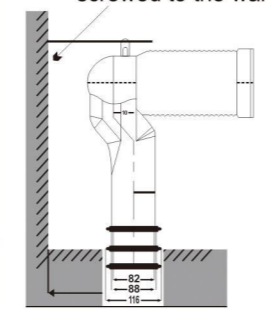
All measurements for roughing-in should be taken from finished wall floor.
Installation must be carried out by a current registered Licensed plumber or warranty will be void.
This warranty does not include faults caused by modification i.e. cut out of ceramic.
Any modification is not allowed and will void the warranty.

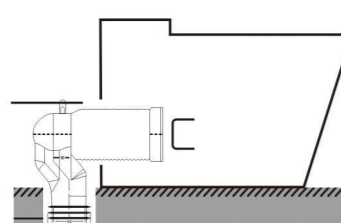
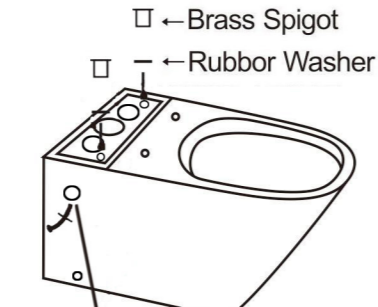
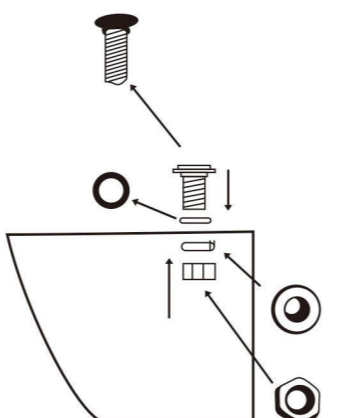
Installation of Toilet Seat and Cleaning

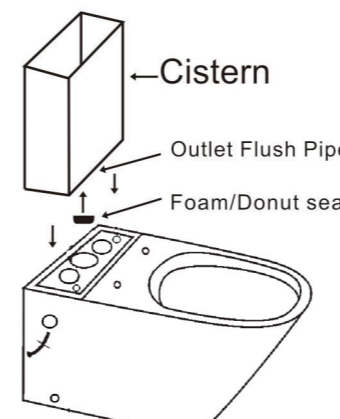
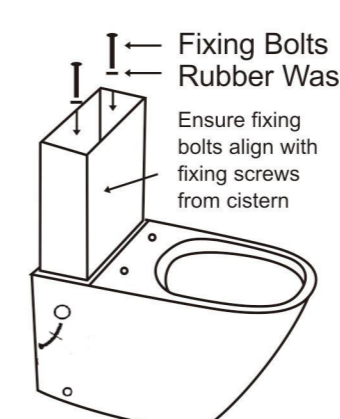
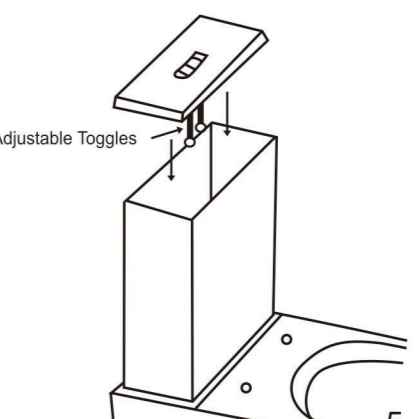
It is recommended that toilet seat and cover be installed after all trades are finished

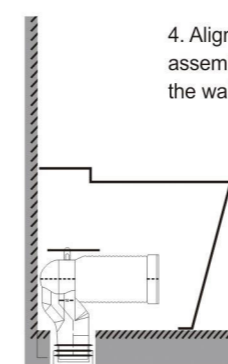
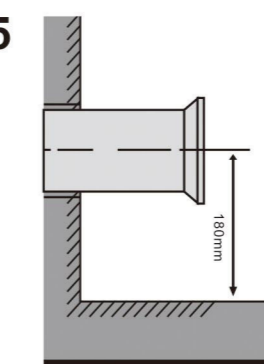
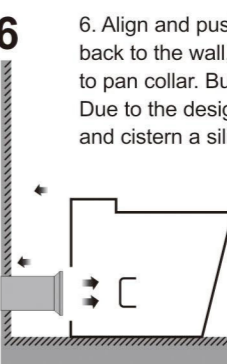
Cleaning Recommendations

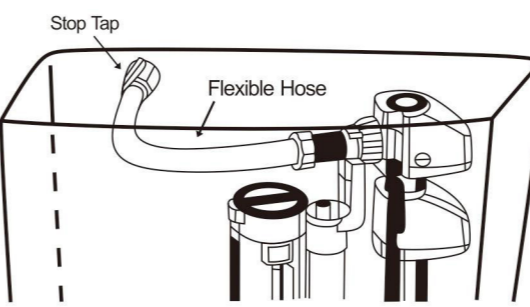
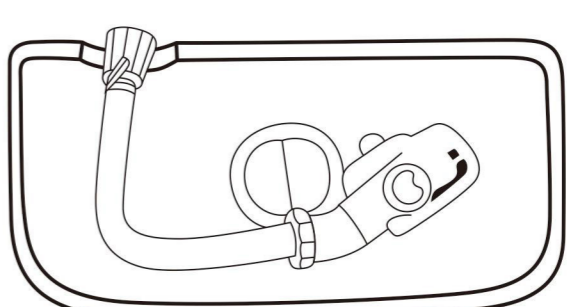
The high quality vitreous china finish on all sanitary ware can be maintained by simply using mild soapy water and wiping over. sanitary ware should not be cleaned with abrasive materials e.g. steel wool/scourers. Do not use any corrosive or abrasive cleaning agents containing acids or scouring agents as this may lead to surface damage.
Bleaches can also discolour seats and hinges and therefore should not be used. If your toilet has metal hinges they should only be cleaned with a mild liquid domestic cleaner, with soft soapsuds or Steel & Chrome cleanser. After cleaning, rinse with clean water and polish with a clean soft cloth.

INSTALLATION INFORMATION		S-Trap	
1		1. Rough in position of water inlet, waste outlet. Ensure inlet connection extends 60mm from finished wall.	2 Fixing plate must be screwed to the wall  2. Lubricate the fins of the pan bend and position into waste pipe.

3	3. Lubricate rubber on the exposed connector end 	TOP INSTALL SYSTEM & EASY- REMOVE □ ← Brass Spigot □ ← Rubber Washer  Side Entry Water Connection (Hose Sold Separately)	1
			2

3	 Cistern Outlet Flush Pipe Foam/Donut seal	4	 Fixing Bolts Rubber Washer Ensure fixing bolts align with fixing screws from cistern	5	 Adjustable Toggles
----------	--	----------	---	----------	---

P Trap					
4	 4. Align and push fully assembled toilet back to the wall	5	 180mm	6	 6. Align and push fully assembled toilet back to the wall, connecting pan spigot to pan collar. Bucket flush and check for leaks. Due to the design, weight and stability of the pan and cistern a silicone adhesive only is recommended and accepted by manufacturer for floor based fixing.

7	 Stop Tap Flexible Hose	8	
7. IF STEP 7 IS COMPLETED, SKIP THIS STEP. Fit off stop tap then connect rear water inlet valve to stop tap. Fill cistern and ensure correct water level.		8. Make sure inlet valve flow are free from side of cistern wall. If inlet valve been jam on the cistern wall, it will cause inlet valve keep filling. The water inlet working pressure: 140Kpa-550Kpa.	

Technical Specification and Attention

Item	Description	Specification
1	Connection size	G1/2
2	Operating temperature range	10~38°C
3	Operating pressure range	0.14~0.55MPa
4	Water consumption for LT-2125A-R	4.5/3L