


FLOW TOP **G2**

Bringing LED strip lighting to the next level, Flow is an advanced silicone strip that incorporates more flex and longevity than ever before. Flow Top is perfect for designs that require a straight application or a vertical bend, and can curve up to 300mm.

- Top emitting light direction –For applying direct light to spaces.
- UV & chemical resistant.
- 5W, 10W, 15W options.
- High CRI – Bringing out the colours in the space.
- IP 67 – Suitable for outdoor & wet applications.
- Front, side, and bottom cable entry connection options.

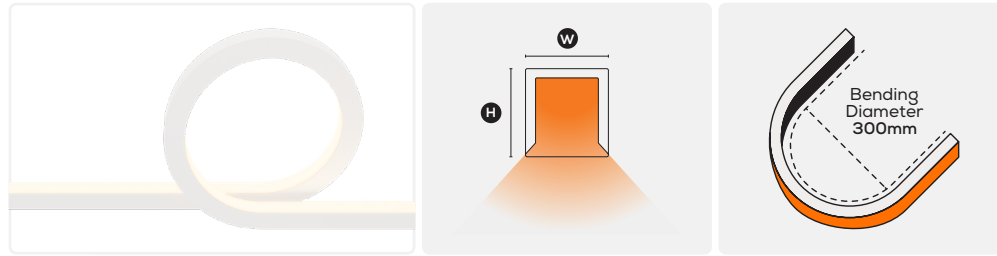

DIMENSIONS **W** 16 mm **H** 17 mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

5W PER METER
342lm | 356lm

10W PER METER
673lm | 702lm

15W PER METER
967lm | 1016lm

GENERAL SPECIFICATIONS

LED **LUMENS** 3000K | 4000K

5W p/m 342lm | 356lm

10W p/m 673lm | 702lm

15W p/m 967lm | 1016lm

EFFICACY P/METER Up To 71 lm/w

COLOUR 3000K, Warm White
4000K, Cool White

MATERIAL Extruded Silicone

FINISH White

BEAM 120°

CRI 90+

IP 67

IK 08

COLOUR DEVIATION SDCM ≤2

BENDING DIAMETER 300mm

LIFETIME > 54,000hrs L70B10

WARRANTY 5 Years

CUTTING LENGTH & MAX RUN LENGTH

LED **CUTTING LENGTHS** **MAX RUN LENGTH** (Integrated | DIY)

5W 50mm 30m | 15m

10W 50mm 20m | 10m

15W 50mm 15m | 6.6m

Allow for 9mm extra on each side for end caps.

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

5W 3000K, 120° **10-FL1617T053**

4000K, 120° **10-FL1617T054**

10W 3000K, 120° **10-FL1617T103**

4000K, 120° **10-FL1617T104**

15W 3000K, 120° **10-FL1617T153**

4000K, 120° **10-FL1617T154**

COMPATIBLE CASAMBI DEVICES

BasicDIM 24V Wireless 4ch **71-CAS24V**

BasicDIM Driver 24V 150W **71-CAS24V150**

BasicDIM Driver 24V 100W **71-CAS24V100**

BasicDIM Driver 24V 60W **71-CAS24V60**

BasicDIM Driver 24V 35W **71-CAS24V35**



FLOW TOP ACCESSORIES

SIDE CABLE ENTRY



Side Cable, Right Entry	10-FL1617PSRE
Side Cable, Left Entry	10-FL1617PSLE
DIMENSIONS	N/A
CABLE ENTRY	Side

REAR CABLE ENTRY



Rear Cable, Right Entry	10-FL1617TPRER
Rear Cable, Left Entry	10-FL1617TPREL
DIMENSIONS	N/A
CABLE ENTRY	Rear

STRAIGHT CABLE ENTRY



Straight Cable, Right Entry	10-FL1617TPFER
Straight Cable, Left Entry	10-FL1617TPFEL
DIMENSIONS	N/A
CABLE ENTRY	Front

END CAP



End Cap	10-FL1617TEC
DIMENSIONS	26.5 (L) x 17 (W) x 24.2 (H) mm
MATERIAL	Stainless Steel
IP	67

ALUMINIUM PROFILE



Aluminium Profile	10-FL1617P2
DIMENSIONS	2000 (L) x 20.2 (W) x 20.8 (H) mm
MATERIAL	Aluminium
FINISH	Silver

CURVED ALUMINIUM PROFILE



Curved Aluminium Profile	10-SP1617CR1M
DIMENSIONS	1000 (L) x 20.2 (W) x 20.8 (H) mm
MATERIAL	Aluminium
FINISH	Silver

MOUNTING CLIPS (SET OF 4)



Mounting Clips	10-FL1617MC
DIMENSIONS	20 (L) x 16.6 (W) x 12.4 (H) mm
MATERIAL	Aluminium
FINISH	Silver
NOTES	Each meter requires 4 clips and 4 screws