

# PRO ROUND

The new generation FAZE PRO downlight is specifically designed to enhance. Utilising superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.



## FEATURES

- + Precision Reflector With Clear Lens - For Better Light Distribution.
- + Specially Designed Heat Sink - For Class Leading Heat Dissipation.
- + IC-4 Rated.
- + Black Baffle Design - Eliminates Glare For Optimum Visual Comfort.
- + Suitable For Concrete Install With Concrete Canister (Ordered Separately).
- + IP44 And Suitable For Wet Areas.
- + Compatible With Remote Casambi Cbu-ted Bluetooth Controllable Dimmer (71-CASCBU) & With Casambi BasicDim Driver 13W (17-CAS350).



## GENERAL SPECIFICATIONS

LED		10W	12W	15W
Lumens	(3000K)	750 lm	830 lm	1015 lm
	(4000K)	805 lm	890 lm	1215 lm
Efficacy	(3000K)	72 lm/W	70 lm/W	66 lm/W
	(4000K)	77 lm/W	75 lm/W	78 lm/W
Colour Temperature	3000K, Warm White			
	4000K, Cool White			
Material	Powder Coated Aluminium			
Finish	White   Black			
Beam	60°   36°   24°   15°			
CRI	97+			
IP	44			
Colour Deviation	SDCM ≤2			
UGR	<19			
Lifetime	>55,000hrs L80 B10			
Warranty	7 Years			

**Please Note:** When using C-Bus, user universal or trailing edge dimming modules.


## PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

## DIMENSIONS

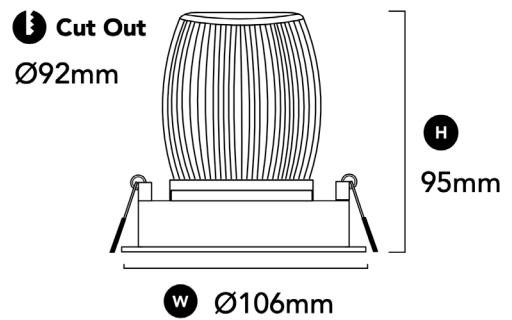

## POWER SPECIFICATIONS

Dimensions	L 107 x W 43 x H 25 mm
Power	250mA   300mA   350mA 240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

**DALI Dimming Available Upon Request**

## PRODUCT CODES

White, 3000K	118-PR7LR13W603
Black, 3000K	118-PR7LR13B603
White, 4000K	118-PR7LR13W604
Black, 4000K	118-PR7LR13B604

## ACCESSORY CODES

36° Reflector	118-RFLP36
24° Reflector	118-RFLP24
15° Reflector	118-RFLP15