


PRO SQUARE G3

The Generation 3 FAZE PRO is a specifically designed to enhance. Utilising superior LED technology, combined with a high CRI, and a re-engineered heatsink; this series of downlights are guaranteed to bring your spaces to life, in an efficient manner.

- Precision reflector or lens options – for enhanced light distribution.
- Specially designed heat sink – for class leading heat dissipation.
- Deep set lamp position – for visual comfort and low glare.
- Generation 3 LED technology.
- Suitable for concrete installation – concrete cannister not included.

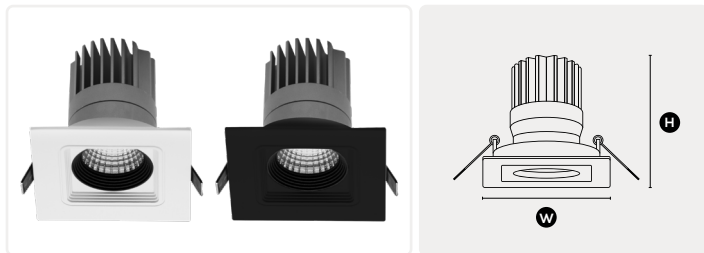

DIMENSIONS **W** 106 x 106mm **H** 95mm

CUT-OUT **i** Ø92mm

LUMINAIRE OPTIONS

LED & LUMENS OPTIONS (3000K | 4000K)

13W 1400lm | 1500lm **10W** 1170lm | 1270lm **8W** 1025lm | 1125lm

BEAM OPTIONS (REFLECTOR / LENS)

60° REFLECTOR **STANDARD** **60°** **36°** **24°** **15°**

FINISHES

☐ **WHITE** ☒ **BLACK**

GENERAL SPECIFICATIONS

EFFICACY	Up to 140 Lm/W
COLOUR	3000K, Warm White 4000K, Cool White
MATERIAL	Powder Coated Material
CRI	92+
IP	44
COLOUR DEVIATION	SDCM ≤2
UGR	<15
LIFETIME	> 55,000hrs L90B10
WARRANTY	7 Years

DRIVER SPECIFICATIONS

DIMENSIONS	L 107 x W 43 x H 25
POWER	350mA 300mA 250mA 240V Remote Flicker Free Dimmable Driver
DIMMING	Phase Cut Dimming
POWER FACTOR	> 0.90

PROJECT DETAILS

PROJECT

TYPE

NOTES

PRODUCT CODES

White, 3000K, 60°	118-PR3LS13W603
White, 4000K, 60°	118-PR3LS13W604
Black, 3000K, 60°	118-PR3LS13B603
Black, 4000K, 60°	118-PR3LS13B604

ACCESSORIES

36° Reflector	118-RFLP36
24° Reflector	118-RFLP24
15° Reflector	118-RFLP15
60° Lens	118-LSE360
36° Lens	118-LSE336
24° Lens	118-LSE324
15° Lens	118-LSE315

DRIVER CODES

DRIVER SOLD SEPERATELY

13W	118-350MA
10W	118-300MA
8W	118-250MA

DALI DIMMING AVAILABLE UPON REQUEST

