


## EDGE XM

The EDGE XM packs a powerful punch! Providing intense illumination with very little energy. Featuring a low-height heatsink.

- Precision reflector with clear lens – For better light distribution.
- Specially designed low-height heat sink – For cramped ceiling spaces.
- Deep set lamp position – For visual comfort and glare reduction.
- Side facing cable output – For spaces that require a tighter fit.
- >55,000hrs L90B10 Lifetime.

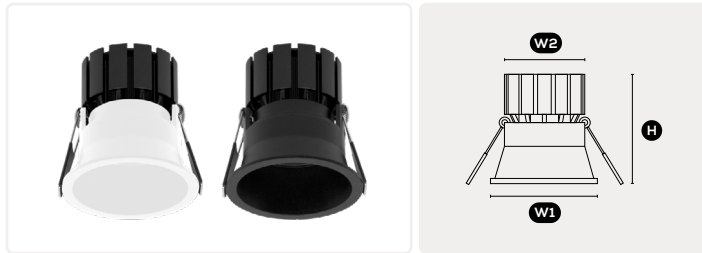

**DIMENSIONS** **W1** Ø86 mm **W2** Ø62 mm **H** 78 mm  
**CUT-OUT** **i** Ø76mm

### LUMINAIRE OPTIONS

#### LED & LUMENS OPTIONS (3000K | 4000K)

**11W** **STANDARD**  
1065lm | 1070lm

**8W**  
920lm | 920lm

**6W**  
740lm | 745lm

#### BEAM OPTIONS

**60°** **STANDARD** **36°** **24°** **15°**

#### FINISHES

☐ **WHITE** ☒ **BLACK**

### GENERAL SPECIFICATIONS

**EFFICACY** Up to 124 Lm/W

**COLOUR** 3000K, Warm White  
4000K, Cool White

**MATERIAL** Powder Coated Material

**CRI** 92+

**IP** 44

**COLOUR DEVIATION** SDCM ≤2

**UGR** <13

**LIFETIME** > 55,000hrs L90B10

**WARRANTY** 5 Years

### DRIVER SPECIFICATIONS

**DIMENSIONS** L 98 x W 40 x H 22 mm

**POWER** 300mA | 240mA | 180mA  
240V Remote Flicker Free  
Dimmable Driver

**DIMMING** Phase Cut Dimming

**POWER FACTOR** > 0.90

**DALI DIMMING AVAILABLE UPON REQUEST**

### PROJECT DETAILS

#### PROJECT

#### TYPE

#### NOTES

### PRODUCT CODES

White, 3000K, 60° **118-ED3XM13W603**

White, 4000K, 60° **118-ED3XM13W604**

Black, 3000K, 60° **118-ED3XM13B603**

Black, 4000K, 60° **118-ED3XM13B604**

### ACCESSORIES

36° Reflector **118-RFLX36**

24° Reflector **118-RFLX24**

15° Reflector **118-RFLX15**

