


# EDGE XM

The EDGE XM packs a powerful punch! Providing intense illumination with very little energy. Featuring a low-height heatsink.

- Precision reflector with clear lens – For better light distribution.
- Specially designed low-height heat sink – For cramped ceiling spaces.
- Deep set lamp position – For visual comfort and glare reduction.
- Side facing cable output – For spaces that require a tighter fit.
- >55,000hrs L90B10 Lifetime.

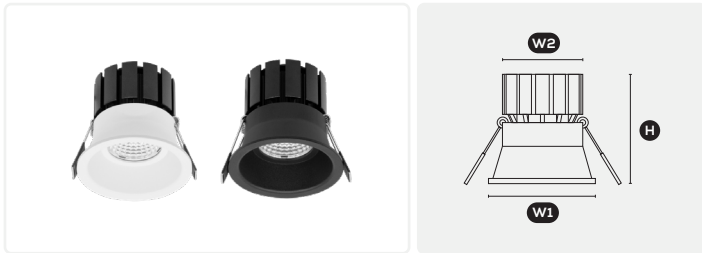

**DIMENSIONS** W1 Ø86 mm W2 Ø62 mm H 78 mm  
**CUT-OUT** Ø76mm

## LUMINAIRE OPTIONS

**LED & LUMENS OPTIONS** (3000K | 4000K)

**11W** STANDARD 1065lm | 1070lm  
**8W** 920lm | 920lm  
**6W** 740lm | 745lm

## BEAM OPTIONS

60° STANDARD 36° 24° 15°

## FINISHES

WHITE  BLACK

## GENERAL SPECIFICATIONS

**EFFICACY** Up to 124 Lm/W

**COLOUR** 3000K, Warm White  
4000K, Cool White

**MATERIAL** Powder Coated Material

**CRI** 92+

**IP** 44

**COLOUR DEVIATION** SDCM ≤2

**UGR** <13

**LIFETIME** > 55,000hrs L90B10

**WARRANTY** 5 Years

## DRIVER SPECIFICATIONS

**DIMENSIONS** L 98 x W 40 x H 22 mm

**POWER** 300mA | 240mA | 180mA  
240V Remote Flicker Free  
Dimmable Driver

**DIMMING** Phase Cut Dimming

**POWER FACTOR** > 0.90

DALI DIMMING AVAILABLE UPON REQUEST

## PROJECT DETAILS

### PROJECT

### TYPE

### NOTES

## PRODUCT CODES

White, 3000K, 60° **118-ED3XM13W603**  
White, 4000K, 60° **118-ED3XM13W604**  
Black, 3000K, 60° **118-ED3XM13B603**  
Black, 4000K, 60° **118-ED3XM13B604**

## ACCESSORIES

36° Reflector **118-RFLX36**  
24° Reflector **118-RFLX24**  
15° Reflector **118-RFLX15**

