


## Coordinates Ceiling 1 Long

Designed by Michael Anastassiades, 2020

52W - 2670lm - 2700K - CRI> 95



Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaires arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 3 ceiling models (C1 – C2 – C4), which may be combined with the respective Long versions for the highest ceilings (C1 Long, C2 Long, C4 Long). The ‘C Module’ is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.

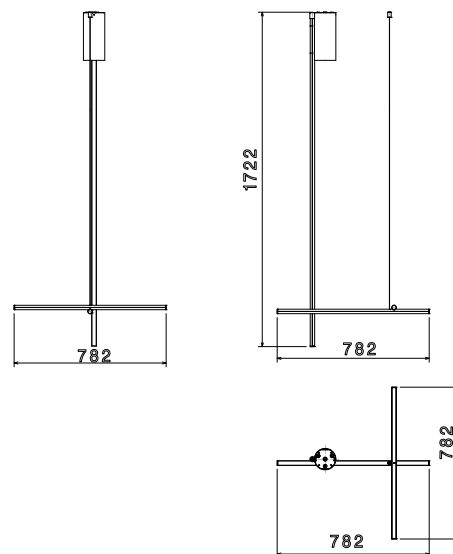

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607001721
Mounting	Ceiling
Environment	Indoor dry location
Light source type	LED
LED type	LED Module
Lamp holder	LED Module
Power (W)	52
Source flux (lm)	2670lm
System flux (lm)	2670

### Physical

Colour	Anodized Champagne
Length (mm)	782
Net weight (kg)	4
IP	20
IP external	20

### Download

Mounting instructions  PDF

### Photometric Files


ULD  ZIP

### Technical Drawings

3D  ZIP



## Schematic light drawing




Luminous flux luminaire  
591 lm


The above drawing is for  
illustrative purposes only and  
refers to product code:  
ASS\_ASTA\_COORDINATES\_780\_10,6W\_LED

## Ecodesign and Energy Labelling

This product contains a light  
source of energy efficiency  
class F



Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

## Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Batteries inside	No