



LOUNGER
LOW LOUNGER
FINISHES

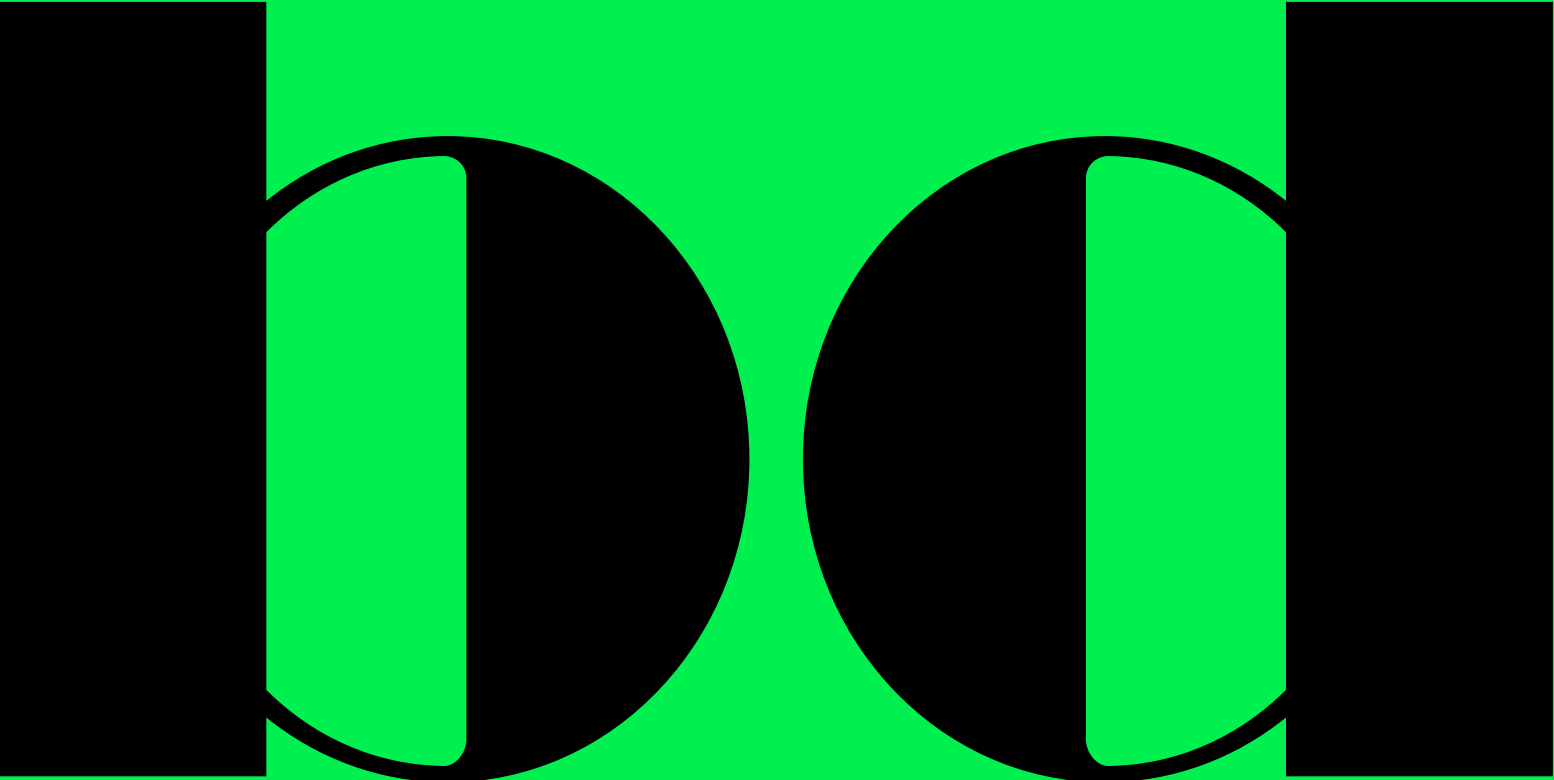


FINISHES


ASH




FR13 - Natural varnished



FT18 - Stained oak



Walnut nature effect




FT10 - Stained black

BASE STRUCTURE
COLORS



ANTHRACITE GREY
RAL 7021 MATTE



PALE BROWN
RAL 8025 MATTE



BEIGE
RAL 1001 MATTE

FLORIDA
REF F

RECOMMENDED FOR
Contract use

COMPOSITION
Raw hide leather (corrected grain)
through dyeing aniline

TEAR RESISTANCE
>20N (UNI EN ISO 3377-1)

CRACK RESISTANCE
50.000 Cycles (UNI EN ISO 5402)


DRY RUB FASTNESS
1.000 Cycles Vol. >4 Grey scale
(UNI EN ISO 11640)

LIGHT FASTNESS
Vol. >6 Blue scale
(UNI EN ISO 105-B02)

FIRE TEST
BS 5852-0 - BS 5852-1
BS5852 CRib5 (optional)
UNI EN 1021-1
UNI EN 1021-2
NFPA 260/UFAC
California TB 117 Section E -AB-2998




Example: F55 - GREEN



F10 - BLACK



F15 - CAMEL



F54 - WHITE



F55 - GREEN



F51- BROWN



F56- TAUPE GREY

DREAM
REF S

RECOMMENDED FOR
Domestic use

COMPOSITION
Chrome tanned raw hides.
Full grain, aniline dyeing.


DRY RUB FASTNESS
150 cycles UNI EN ISO 11640

WET RUB FASTNESS
50 cycles UNI EN ISO 11640

RESISTANCE TO WATER DROP
UNI EN ISO 15700 >3 Grey scale

TEAR RESISTANCE
>40N UNI EN ISO 3377-2

FIRE TEST
BS 5852:2006 Cigarette test
BS 5852:2006 Match test
UNI EN 1021-1: 2014 Cigarette test
UNI EN 1021-2: 2014
California TB117 Section E

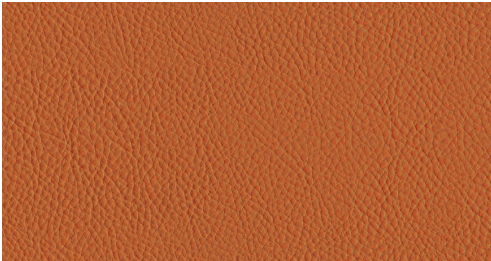

Example: S50 - GRAPEFRUIT



S40 - BLACK




S45 - CLAY




S46 - ALPINE



S60 - GRAPEFRUIT




S51 - GARNET




S52 - BLUE



S53 - BEIGE



S54 - BROWN

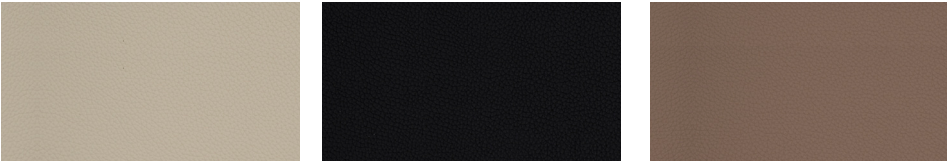PANAMA REF P	RECOMMENDED FOR Contract use	WET RUB FASTNESS 250 Cycles / Vol. 5 Grey scale (ISO 11640)	
	COMPOSITION Raw hide leather (corrected grain)	LIGHT FASTNESS 72 h. exposition / Vol. 5 Grey scale (EN ISA 105-B02)	
	TEAR RESISTANCE 20N (EN3377-1)	FIRE TEST BS 5852-0 - BS 5852-1 BS5852 CRib5 (optional) UNI EN 1021-1 UNI EN 1021-2 NFPA 260/UFAC California TB 117 Section E - AB-2998	
	CRACK RESISTANCE 50.000 Cycles (EN ISO 5402)		
	DRY RUB FASTNESS 1.000 Cycles / Vol. 5 Grey scale (ISO 11640)		
			
P01 - SAND P10 - BLACK P15 - DARK BROWN			

Example: P01 - Sand

**RUSTICO NABUK
(VINTAGE)**
REF V

RECOMMENDED FOR
Domestic use

COMPOSITION
NABUK: Through dyeing aniline

TEAR RESISTANCE
>20N (UNI EN ISO 3377-1:2012)


DRY RUB FASTNESS
50 cycles / Vol. >3 Grey scale
(ISO 11640)

LIGHT FASTNESS
Vol. >3 Blue scale (EN ISA 105-B02)


FIRE TEST
BS 5852-0 - BS 5852-1
UNI EN 1021-1
UNI EN 1021-2
NFPA 260 / UFAC
FS191 Método S903 - Port Authority of NY
IMO Resolution A.652 (16)
California TB 117 Section E - AB-2998




Example: V19 - Testa di Moro



V10 - AGED BLACK



V19 - AGED TESTA DI MORO



V22 - GREY

SCALA (ELASTRON)
REF CAT 1

COMPOSITION
100% Polyester

WIDTH
143

WEIGHT
386

CIGARETTE REISTANCE
Pass

ANTI-SATIN


ABRASION TEST
> 80.000

PILLING
3-4

COLOUR FASTNESS ARTIFICIAL LIGHT
ISO 105-B02: 5

COLOUR FASTNESS TO RUBBING
ISO 105-X12
Dry 5
Wet 5

WASHING CONDITIONS




Example: SC40 – SAND



SC88 – NATA




SC40 – SAND



SC01 – YELLOW




SC69 – LIMA




SC51 – CORAL




SC53 – RED




SC15 – SKY



SC57 – FOREST



SC45 – ASH



SC25 – BLACK

VORTICE (ABITEX)
REF CAT 2

COMPOSITION
100% acrylic (water repellent)

WIDTH
160

WEIGHT
260

DYEING
Solution dyed product

ROLL LENGHT
Approx. 50 lm

COLOR FASTNESS TO LIGHT
7/8, ISO 105 B02


FASTNESS TO RUBBING
dry 4/5, wet 5, ISO 105 X12.

FIRE RESISTANCE
California TB 117-2013
NFPA 260 Class 1


WASHING CONDITIONS





Example: VO102- BEIGE



VO102- BEIGE



VO300 - GARNET




VO500-YELLOW




VO503 - MUSTARD




VO603 - DARK GREY




VO702 - DARK BLUE



VO705 - LAVENDER BLUE



VO706 - NAVY BLUE



VO800 - FOREST GREEN



VO804 - GREEN TEA

WOOLEN (JAB)
REF CAT 3

COMPOSITION
100% Polyester

WASHING CONDITIONS



MARTINDALE
90.000 cycles

WIDTH
140


WEIGHT
640 GSM



Example: WO62 – PRUSSIAN



WO11 – CHERRY



WO23 – MINK




WO41 – MUSTARD




WO52 – PRUSSIAN



WO61 – MORGANITE



WO72 – SAND



WO80 – PLUM




WO84 – CERULEAN



WO85 – MINT



WO93 – SLATE



WO99 – ANTHRACITE

TEMPO (MAHARAM)
REF CAT 6


COMPOSITION
100% Polyester

MARTINDALE
100.000 cycles


WIDTH
140 cm

WEIGHT
700 gr/lm

WASHING CONDITIONS

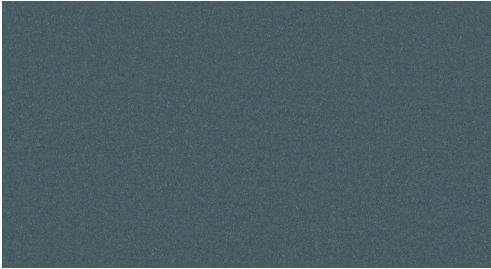

Example: TE09 - ADORNMENT



TE02 - GRANDSTAND




TE04 - BATTLESHIP




TE07 - SWIMMING




TE08 - AMBIENCE



TE09 - ADORNMENT




TE11 - FANG



TE15 - FARMLAND



TE20 - GAZELLE



TE21 - SHITAKE




TE22 - FLAXSEED




TE24 - FLOWERY



TE25 - BURGUNDY



TE27 - PETUNIA



TE28 - CAMPSITE

CONTACT

HEADQUARTERS

C/ de Ramon Turró, 126,
08005 Barcelona, Spain

SALES & ENQUIRES

sales@bdbarcelona.com

BD Barcelona, 2025.

All rights reserved. No part of this publication
may be reproduced in whole or in part without
the permission of the publisher.

View our products at bdbarcelona.com

Follow us: [@bdbarcelona](https://twitter.com/bdbarcelona)

