



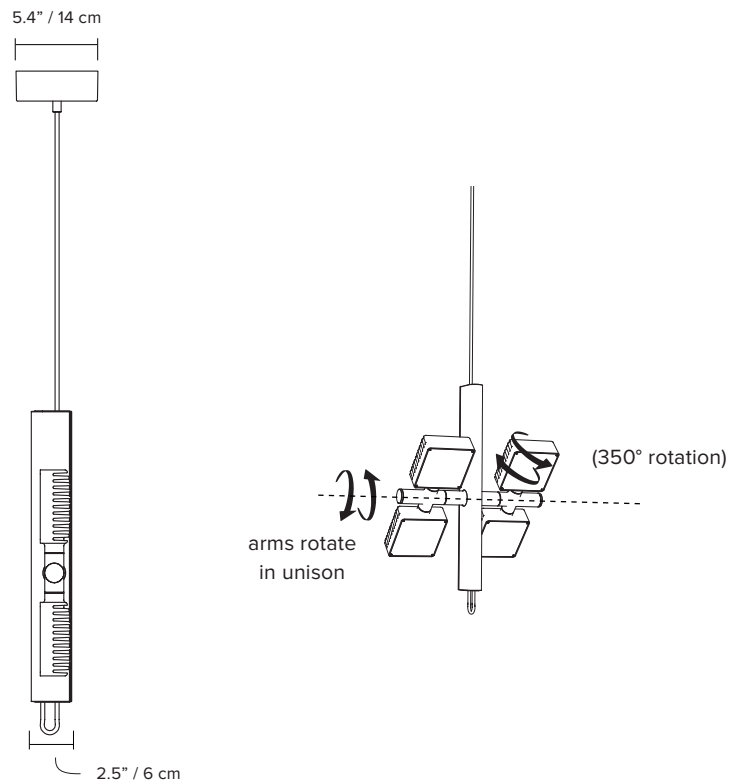

DORVAL 01

Based on SCMP DESIGN OFFICE's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

- type:** pendant
- construction:** polished aluminum body, head and canopy
clear prismatic PMMA lens
polyester cord, steel cord for aluminum finish
- specifications:** source: LED array, integrated
power consumption: 36W
color temperature: 3000K
2700K
dim to warm 3000k to 2200k
dim to warm 2700k to 2200k
lumen output: 3000K - 3106 lm
2700K - 2888 lm
colour rendering index: ≥90 CRI
colour consistency: 3 SDCM
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V on/off or trailing edge dimming only
refer to our recommended list of dimmer models
- cord length:** 108" / 275cm
- weight:** 11.5lb / 5.2kg
- certifications:**     IP20
- warranty:** 2 years

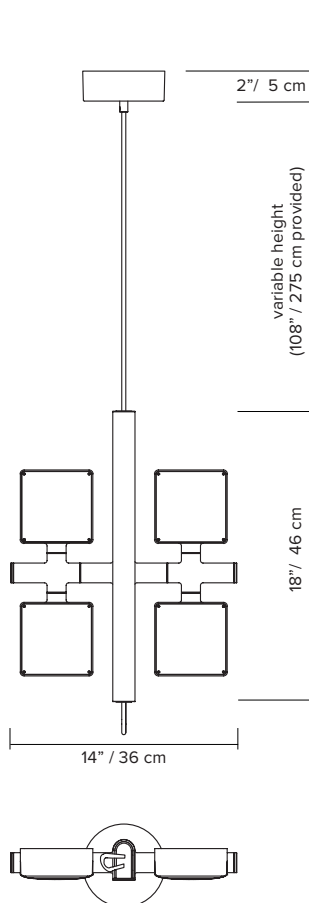

*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	BODY, CORD AND LOOP	CANOPY	COLOUR TEMPERATURE (CCT)	DIMMING
DOR dorval	01	BK black WH white MB midnight blue LB light blue BG beige AL aluminum	BK black WH white MB midnight blue LB light blue BG beige AL aluminum	WL warm light (2700K) NL neutral light (3000K) D27 dim to warm (2700K-2200K) D30 dim to warm (3000K-2200K) CCT other CCT available upon request *	ZT 0-10V dimming PH phase dimming
DOR	01	BK <small>*only available with black cord and loop</small>	BK	WL	ZT = DOR01BKKBKWLZT example


* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH



NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset available upon request
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

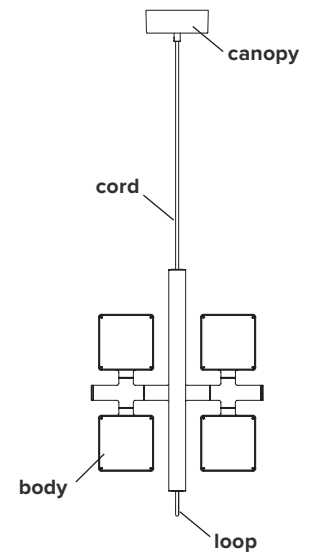

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Lutron	DVELV303P	100%	9%	Phase Cut
Lutron	MAELV600	100%	3%	Phase Cut
Lutron	SELV300P	100%	9%	Phase Cut
Lutron	CTELV-303P	100%	5%	Phase Cut
Lutron	CTRP-253P	100%	5%	Phase Cut
Lutron	PD-5NE	100%	7%	Phase Cut
Lutron	DVRP-253P	100%	5%	Phase Cut
Lutron	MA-PRO	100%	6%	Phase Cut
Lutron	NTRP-250	100%	8%	Phase Cut
Lutron	NTELV-300	100%	9%	Phase Cut

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase dimming (trailing edge only**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

