

## HYDRONIC PANEL RADIATORS

MANUFACTURED BY:



Hydronic panel radiators are not only high performance – elegance, superb finish and design are an integral part of the completed product.

Made using top quality techniques and materials, it guarantees high thermal efficiency and great reliability. Interior design trends change and redefine spaces, but its compact essential shape is always modern and versatile.



**25 YEAR\***  
**WARRANTY**



### FINISHES

High gloss white, unique finish both scratch and corrosion resistant.

### COLOUR

Standard white - RAL 9016.

### MEASUREMENTS

Heights from 300mm to 900mm. Widths from 400mm up to 3000mm.

Available as single, compact, double and triple panels.



**HUNT HEATING**  
**The smart choice.**

### CENTRE CONNECTION (OPTIONAL)



### TOP GRILLE



### SHOWROOM

11 Fiveways Boulevard  
Keysborough  
VIC 3173

**PHONE** 1300 00 1800

**FAX** (+613) 9798 5133

[enquiries@huntheat.com.au](mailto:enquiries@huntheat.com.au)

[www.huntheat.com.au](http://www.huntheat.com.au)

Tables based on  $\Delta T$  60° C - mean water temperature in radiator of 80°C and room temperature of 20°C.  
Radiator outputs to EN442 Standard. - NB: High sizes available for order (not ex stock).

| Type 11 Single |      |       |       |       |       |       |
|----------------|------|-------|-------|-------|-------|-------|
| L-mm           | H-mm | 300   | 400   | 500   | 600   | 700   |
| 400            | kW   | 0.286 | 0.365 | 0.440 | 0.513 | 0.584 |
| 500            | kW   | 0.357 | 0.456 | 0.551 | 0.642 | 0.730 |
| 600            | kW   | 0.429 | 0.547 | 0.661 | 0.770 | 0.876 |
| 700            | kW   | 0.500 | 0.638 | 0.771 | 0.898 | 1.022 |
| 800            | kW   | 0.572 | 0.730 | 0.881 | 1.027 | 1.168 |
| 900            | kW   | 0.643 | 0.821 | 0.991 | 1.155 | 1.314 |
| 1000           | kW   | 0.715 | 0.912 | 1.101 | 1.283 | 1.460 |
| 1100           | kW   | 0.786 | 1.003 | 1.211 | 1.412 | 1.606 |
| 1200           | kW   | 0.857 | 1.094 | 1.321 | 1.540 | 1.752 |
| 1400           | kW   | 1.000 | 1.277 | 1.541 | 1.798 | 2.044 |
| 1600           | kW   | 1.143 | 1.459 | 1.762 | 2.053 | 2.336 |
| 1800           | kW   | 1.286 | 1.642 | 1.982 | 2.310 | 2.628 |
| 2000           | kW   | 1.429 | 1.824 | 2.202 | 2.566 | 2.920 |
| 2300           | kW   | 1.644 | 2.098 | 2.532 | 2.951 | 3.358 |
| 2600           | kW   | 1.858 | 2.371 | 2.863 | 3.336 | 3.796 |
| 3000           | kW   | 2.144 | 2.736 | 3.303 | 3.850 | 4.380 |



| Type 21 Compact |      |       |       |       |       |       |
|-----------------|------|-------|-------|-------|-------|-------|
| L-mm            | H-mm | 300   | 400   | 500   | 600   | 700   |
| 400             | kW   | 0.419 | 0.525 | 0.629 | 0.731 | 0.832 |
| 500             | kW   | 0.523 | 0.657 | 0.786 | 0.918 | 1.040 |
| 600             | kW   | 0.628 | 0.788 | 0.913 | 1.096 | 1.248 |
| 700             | kW   | 0.733 | 0.919 | 1.100 | 1.278 | 1.456 |
| 800             | kW   | 0.837 | 1.050 | 1.257 | 1.461 | 1.664 |
| 900             | kW   | 0.942 | 1.182 | 1.415 | 1.644 | 1.872 |
| 1000            | kW   | 1.046 | 1.313 | 1.572 | 1.828 | 2.080 |
| 1100            | kW   | 1.151 | 1.444 | 1.729 | 2.009 | 2.288 |
| 1200            | kW   | 1.256 | 1.576 | 1.886 | 2.192 | 2.496 |
| 1400            | kW   | 1.465 | 1.838 | 2.200 | 2.557 | 2.912 |
| 1600            | kW   | 1.674 | 2.101 | 2.515 | 2.922 | 3.328 |
| 1800            | kW   | 1.884 | 2.364 | 2.829 | 3.287 | 3.744 |
| 2000            | kW   | 2.093 | 2.626 | 3.144 | 3.653 | 4.160 |
| 2300            | kW   | 2.407 | 3.020 | 3.615 | 4.200 | 4.784 |
| 2600            | kW   | 2.721 | 3.414 | 4.087 | 4.748 | 5.408 |
| 3000            | kW   | 3.139 | 3.939 | 4.715 | 5.479 | 6.240 |




| Type 22 Double |      |       |       |       |       |       |
|----------------|------|-------|-------|-------|-------|-------|
| L-mm           | H-mm | 300   | 400   | 500   | 600   | 700   |
| 400            | kW   | 0.505 | 0.646 | 0.778 | 0.901 | 1.016 |
| 500            | kW   | 0.631 | 0.807 | 0.972 | 1.128 | 1.271 |
| 600            | kW   | 0.757 | 0.969 | 1.166 | 1.351 | 1.525 |
| 700            | kW   | 0.883 | 1.130 | 1.361 | 1.576 | 1.779 |
| 800            | kW   | 1.009 | 1.292 | 1.555 | 1.802 | 2.033 |
| 900            | kW   | 1.136 | 1.453 | 1.750 | 2.027 | 2.287 |
| 1000           | kW   | 1.262 | 1.615 | 1.944 | 2.252 | 2.541 |
| 1100           | kW   | 1.388 | 1.776 | 2.139 | 2.477 | 2.795 |
| 1200           | kW   | 1.514 | 1.938 | 2.333 | 2.702 | 3.049 |
| 1400           | kW   | 1.766 | 2.261 | 2.722 | 3.153 | 3.558 |
| 1600           | kW   | 2.019 | 2.584 | 3.111 | 3.603 | 4.066 |
| 1800           | kW   | 2.271 | 2.906 | 3.499 | 4.054 | 4.574 |
| 2000           | kW   | 2.523 | 3.229 | 3.888 | 4.504 | 5.082 |
| 2300           | kW   | 2.902 | 3.714 | 4.472 | 5.180 | 5.845 |
| 2600           | kW   | 3.280 | 4.198 | 5.055 | 5.855 | 6.607 |
| 3000           | kW   | 3.785 | 4.844 | 5.832 | 6.758 | 7.623 |



| Type 33 Triple |      |       |       |       |       |        |
|----------------|------|-------|-------|-------|-------|--------|
| L-mm           | H-mm | 300   | 400   | 500   | 600   | 700    |
| 400            | kW   | 0.712 | 0.907 | 1.091 | 1.264 | 1.425  |
| 500            | kW   | 0.889 | 1.134 | 1.363 | 1.580 | 1.782  |
| 600            | kW   | 1.067 | 1.361 | 1.636 | 1.895 | 2.138  |
| 700            | kW   | 1.245 | 1.587 | 1.909 | 2.211 | 2.495  |
| 800            | kW   | 1.423 | 1.814 | 2.181 | 2.527 | 2.851  |
| 900            | kW   | 1.601 | 2.041 | 2.454 | 2.843 | 3.207  |
| 1000           | kW   | 1.779 | 2.268 | 2.727 | 3.159 | 3.564  |
| 1100           | kW   | 1.957 | 2.495 | 2.999 | 3.475 | 3.920  |
| 1200           | kW   | 2.135 | 2.721 | 3.272 | 3.791 | 4.276  |
| 1400           | kW   | 2.491 | 3.175 | 3.817 | 4.423 | 4.989  |
| 1600           | kW   | 2.846 | 3.628 | 4.363 | 5.055 | 5.702  |
| 1800           | kW   | 3.202 | 4.082 | 4.908 | 5.686 | 6.415  |
| 2000           | kW   | 3.558 | 4.536 | 5.453 | 6.318 | 7.127  |
| 2300           | kW   | 4.092 | 5.216 | 6.271 | 7.266 | 8.197  |
| 2600           | kW   | 4.625 | 5.896 | 7.089 | 8.214 | 9.266  |
| 3000           | kW   | 5.337 | 6.803 | 8.180 | 9.477 | 10.691 |



### Standard bracket supplied with DeLonghi radiators

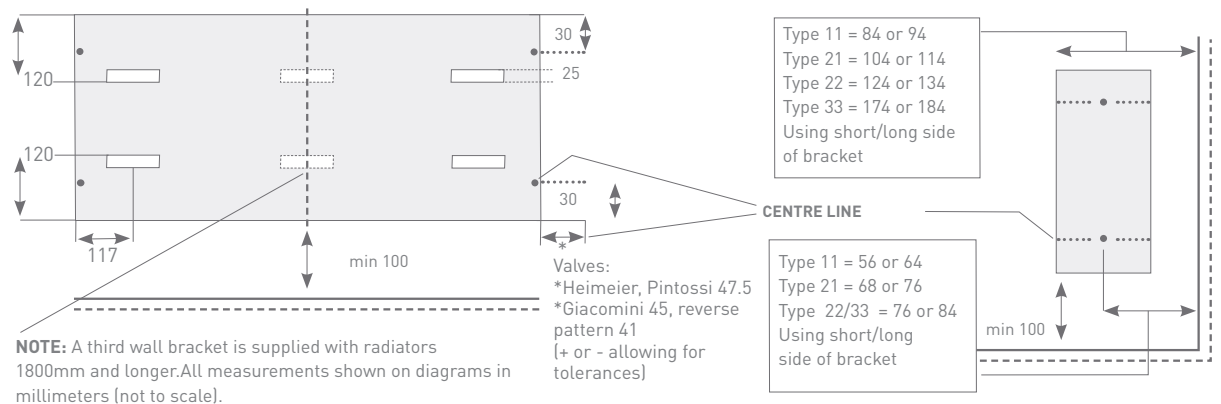

### Instructions for placement of noggins for De Longhi radel steel panel radiators.

Suggested size for noggins; 90mm x 40mm framing timber installed vertically to either side of the radiator and set in 116mm from side of radiator. This will ensure you have suitable fixing for brackets.

NOTE: All measurements shown on diagrams in millimeters (not to scale).