

 Veneer Stone



Dry Stack Collection
Technical Guide
Inspired by Native Australian Stone



Contents

Colour Selection	02
Gallery	04
Benefits	06
Product Specification	08
Installation Guide	10

Choose Your


Colour



LIMESTONE




TRAVERTINE



DUNE



EARTH



SANDSTONE



NATURAL GREY



GRANITE



BLUESTONE

Commonly blended colours for a contrasted finish are:

Limestone & Travertine (like Three Birds Renovations House 18)

Sandstone & Natural Grey

Earth & Bluestone

The product colours in this booklet are as accurate as current photography & printing techniques allow.
We suggest you look at actual samples for a better idea and selection.

Capping



LIMESTONE



TRAVERTINE



EARTH



SLATE



SANDSTONE



NATURAL GREY



GRANITE



BLUESTONE

Pier Caps



SANDSTONE



TRAVERTINE



LIMESTONE



GREY




CHARCOAL

Pier Caps:
 Sandstone (for Dune and Sandstone)
 Travertine
 Limestone (for Dune and Limestone)
 Grey (for Natural Grey and Granite)
 Charcoal (for Slate and Bluestone)

The product colours in this booklet are as accurate as current photography & printing techniques allow.
 We suggest you look at actual samples for a better idea and selection.

Dry Stack

The Dry Stack Collection artfully blends rustic aesthetics with timeless appeal. Its sleek, mortarless design creates a seamless appearance, while the unique texture of the stone adds an impressionistic touch. This collection enhances any space, bringing a harmonious balance of modern sophistication and enduring charm.

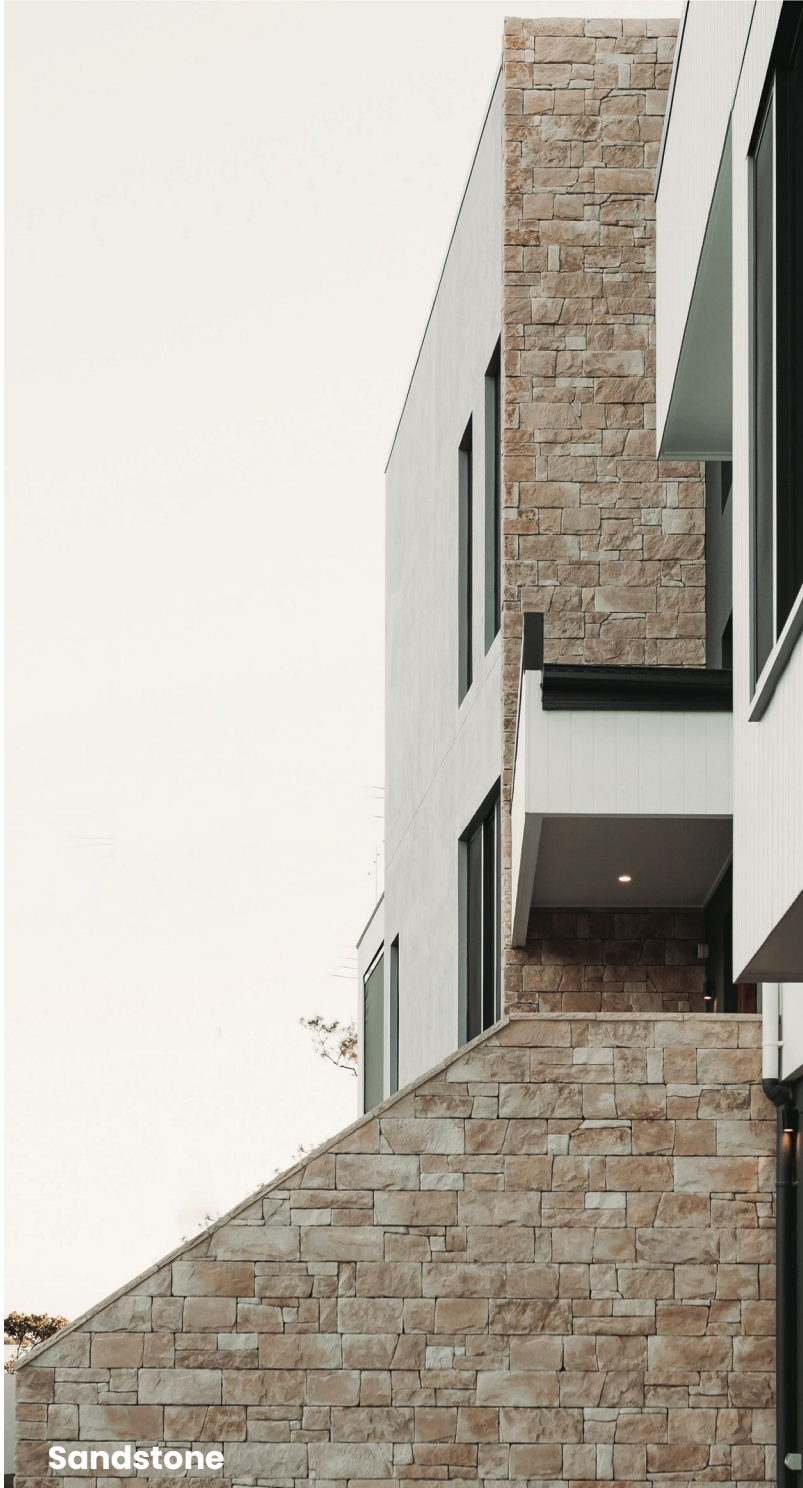



Scan Me
For more project
images visit our
image library



Limestone

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.

Benefits



Bluestone



Limestone



Light
Weight




Aesthetics



Highly
Durable



Low
Maintenance

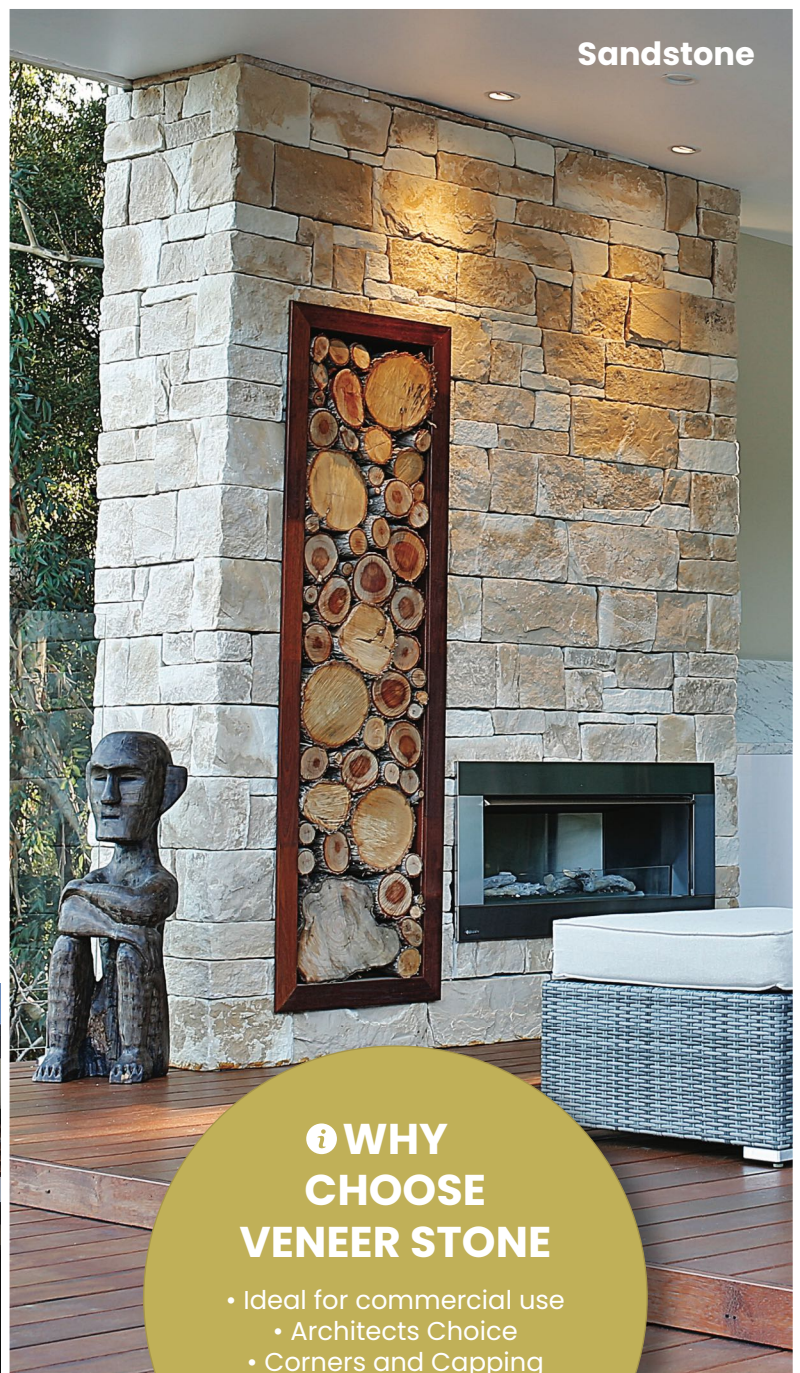

WHY CHOOSE VENEER STONE

- Ideal for commercial use
 - Architects Choice
- Corners and Capping available to suit all products
- Australian Made and Owned

We carefully blend crushed sandstone with less than 1% natural colour pigments to create the distinctive look and relaxed feel of solid natural stone walling with a fraction of the weight. All products come in tile form and range from 25-35mm in thickness. Capping is available for all products and is highly recommended for use.

Inspired by the harsh Australian climate, Veneer Stone ages beautifully. When unsealed, it takes on an historic look after years of weathering. Or, to retain the fresh quarried look and enhance the natural colours, you simply seal the stone with a penetrating sealer.

Please note: all sizes printed are approximate and are subject to change. For current exact measurements please contact Head Office on 02 4606 4907.

Dry Stack

All weights and measurements are approximate.

Order Multiples Bodies	48.5 kg/m ²	per box 0.55 m ² 27 kg	per pallet 19.8 m ² 972 kg approx.
------------------------	------------------------	--	--

Order Multiples Corners	15 kg per L/m	per box 1 L/m 15 kg	per pallet 40 L/m 600 kg approx.
-------------------------	---------------	--------------------------	---------------------------------------

RANDOM SIZES:

approx. LENGTH: 480mm – 500mm


approx. WIDTH: 187mm – 200mm

approx. HEIGHT: 25mm – 35mm


Prefabricated corners available for all products.
6 – 12 individual corners per lineal metre.




Dry Joint



12mm Recessed Joint



15 mm Over Grouted



LIMESTONE



SANDSTONE



TRAVERTINE



NATURAL GREY



DUNE




GRANITE



EARTH





BLUESTONE

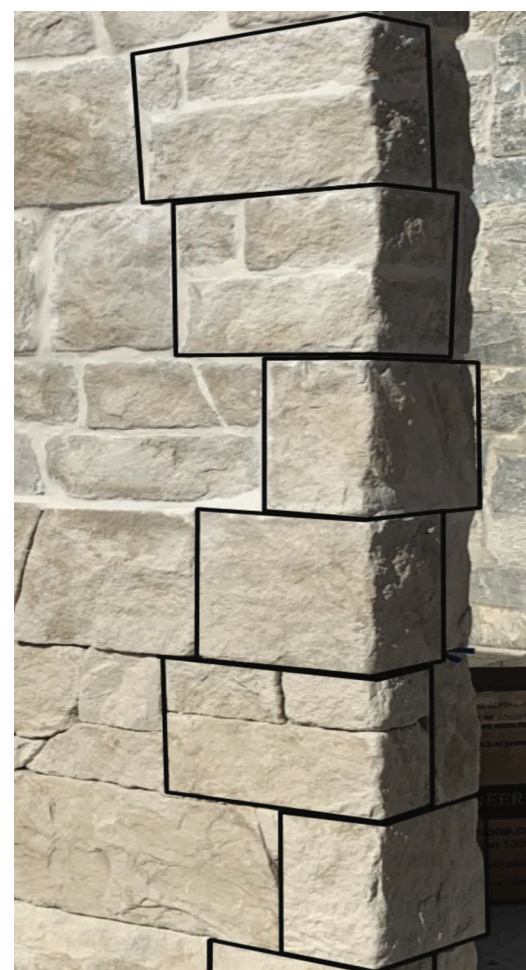

Estimating Stone Required


When installing with dry joints (dry stacked) add an extra 10-15% to allow for extra cuts and wastage.

Bodies: Calculate the total surface area by square metre.

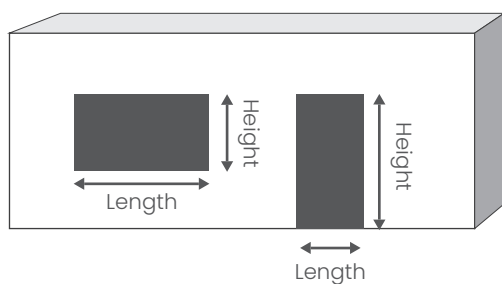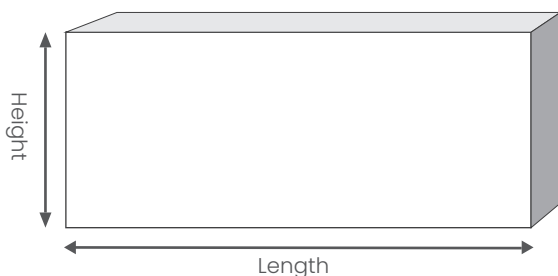

Corners: Calculate the lineal metres of corner stones required by measuring all external corners from top to bottom.

Please note 1 lineal metre of corners equates to approximately 0.2 m² of surface area. (deductible off bodies)

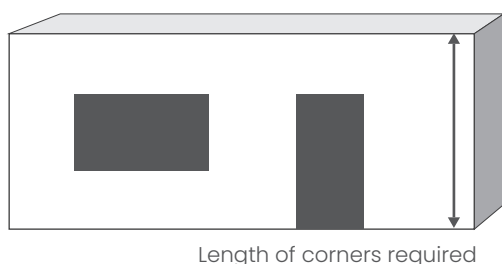

Veneer Stone estimation calculator
www.veneerstone.com.au/calculator

Random Shade Variation

Extreme colour and texture variation will occur from piece to piece and within each batch for a random look. The look of the final installation will be unique. Please review the range of products before making your final selection.

Approximate Weights

	Bodies	Corners
Dry Stack Range	48.5 kg/m ²	15 kg per L/m

Application

Suitable for interior and exterior walls, Veneer Stone can be installed around fireplaces, though no closer than 25cm to a naked flame. Veneer Stone can also be installed around wet areas, however, continued exposure to chlorine and other chemicals may eventually affect the colouration of the products. When frequently exposed to water, we recommend protection with Ven Seal Ultra WB sealer.

Corners: There are approx. 10 different shapes and sizes, each box contains a mixture of:

Short Return Range: 70 - 120mm

Long Return Range: 110 - 260mm

Capping: approx. Width 280-300mm x Length 490-510mm, Thickness 35-45mm

Pier Caps: available sizing
 390 x 390mm, Thickness 50mm

Installation

Joint Width: The Dry Stack collection has been designed to be installed with either a dry joint or an 8 – 12 mm mortar/grout joint. When applying the stones, use timber or plastic dowels/wedges to keep the joints evenly spaced. Due to the nature of the product, stones will vary in size and may need extra wedges to allow for height variation.

Installation Tips:

- If your application requires corners, apply these first alternating the long and short return in opposite directions.
- After corner pieces have been applied, apply the bodies 1 layer at a time, working towards the edge/centre.
- Colour, size and texture variation is an essential aspect of a natural looking stone wall. Select stone from different boxes and lay out across your job site to ensure you gain this look. The visual effect will be enhanced by an overall natural mixed presentation. Cut or trim the stones using a hammer & bolster, wet saw or angle grinder with diamond blade attached.

Webbed Panel Sizes:

185 – 200mm high x 470 – 500mm long x 25 – 35mm thick

Individual stones attached to the webbing vary in sizes:

- Height: approx. 40, 80, 100, 120, 160 & 200mm
- Length: random ranging from 50mm – 500mm

Individual Stones Are Held Together With Flexible Webbing:

Sample Installation pattern – like brick work, avoid straight vertical lines when applying the webbed panels.



Installing with Dry Joint: Please ensure either the wall or adhesive are a dark colour before starting. This can be done by purchasing a dark tile adhesive or tinting adhesive mortar with black oxide. This will help cast a shadow between stones giving a deep solid dry stone look. Take time once the pattern is laid to cut thin stones to fill small gaps between the larger joints. This is very important, it will break up the pattern and provide the perfect hand crafted stone masonry look.

Installing with Mortar Joint: Pointing mortar or tile grout can be used to fill the joints. One of the easiest and fastest ways to fill the joints is with a piping gun or piping bag.

To retain the original fresh quarried look we suggest sealing the stone. If you would like the stone to mellow slightly and gain the European look after years of harsh weathering don't seal the product.

Inspired By Nature

We provide an extensive selection of stone veneers to suit even the most discerning tastes. Our range of colours and textures is inspired by native stone, such as McLaren Vale limestone, Victorian bluestone, and Central Coast sandstone. With our offerings, you can achieve a timeless and natural Australian aesthetic that will beautifully enhance any property.

Improves with Age

Inspired in the harsh Australian climate, Veneer Stone ages beautifully. When unsealed, it takes on an historic look after years of weathering. Or, to retain the fresh quarried look and enhance the natural colours, you simply seal the stone with a penetrating sealer.

Unprecedented Style

Our stunning collection of stone veneers allows you to create contemporary or classic designs with the distinctive look and relaxed feel of solid stone walling. Veneer Stone is suitable for tiling over many internal and external surfaces. It's the perfect solution for your stone walling with less impact on the environment than solid stone.

Australian Product

Designed and manufactured in Australia, Veneer Stone is made from a blend of crushed sandstone with less than 1% natural colour pigments. All stone comes in tile form, from 20 to 43 millimetres thick, and is easy to install. Pre-fabricated corners and capping are highly recommended for creating a refined solid stone look.

Veneer Stone is a Family owned business which commenced trading in 1998. We have already undertaken a number of prestigious projects throughout Australia for Architects, Builders, Property Developers, Home Owners and Renovators. We welcome the opportunity to earn your trust and discuss how we can make your ideas become a reality.

Veneer Stone handcraft the highest quality, attractive and easy to install stone veneers. All Veneer Stone products and colours are inspired by native Australian stone. Veneer Stone can be used for residential and commercial applications, both indoors and outdoors.

Veneer Stone is based on the belief that our customers' needs are of the utmost importance. Our entire team is committed to meeting those needs. As a result, a high percentage of our business is from repeat customers and referrals.

For more information, visit our website, a display location near you, or contact us.

Veneer Stone has warehouse locations in Appin, NSW, Danenong Vic, Darra Depot Qld and Mount Barker SA.

Contact Us



15 Technology Drive,
Appin NSW 2560
Australia
Head Office

2/26 Egan Road,
Dandenong VIC 3175
Australia
VIC Warehouse

Darra Depot,
Brisbane QLD
Australia
QLD Warehouse



/veneerstone



1300 984 572



/veneerstoneaustralia



veneerstone.com.au