



WHEEL CHOCK

A simple design for a simple function. The Wheel Chock holds a bicycle upright, so you can more easily inflate tires or make minor adjustments. Available in a floor mount and repair mount option to work wherever you need it. The stylish cut-outs on the sides of the Wheel Chock provide a visual indication of what it's for.



RTL >>



Product Details

- Supports bikes without kickstands while inflating tires
- Tire friction stops roll-back, upright position eliminates trip hazard
- Accommodates tires up to 2.75" and wheel diameters up to 29"
- Cannot lock bikes to the Wheel Chock
- ADA compliant

Specifications

Model #	Finish	Type of Mount	Weight	Length	Width	Height	Space Requirement
26190C	Powder Coat	Floor Mount	16 lbs.	6"	6"	25.5"	See Back
26190G	Galvanized	Floor Mount	16 lbs.	6"	6"	25.5"	See Back
26190S	Stainless	Floor Mount	16 lbs.	6"	6"	25.5"	See Back
26195C	Powder Coat	Repair Stand Mount	16 lbs.	6"	6"	25.5"	See Back
26195G	Galvanized	Repair Stand Mount	16 lbs.	6"	6"	25.5"	See Back
26195S	Stainless	Repair Stand Mount	16 lbs.	6"	6"	25.5"	See Back


Our Bike Fixation representatives can assist with custom layout and spacing to meet your room dimensions and desired bike capacity.

RTL >>

Wheel Chock

Recommended Spacing

- Minimum of 41" from side of Deluxe Public Work Stand to wall or other objects
- Minimum of 47" from back of Deluxe Public Work Stand to wall
- Minimum of 60" from an adjoining street or cycle path

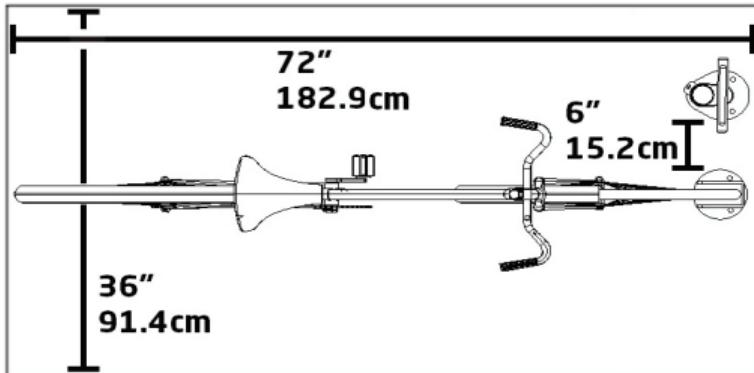

Product Information



Manufactured by Bike Fixation

1 bike



Stainless Steel

Materials



Powder Coat
Galvanized
Stainless Steel



Instillation hardware
included



Made in the USA



2 year warranty



Standard Colors

Proudly Brought to You By:

0800 785 744



rtl.co.nz

Downloadable product resources available online:



CAD Files



SketchUp Files



Written Specs



Photos