

Linea Neon Top Bendable RGBW 10W

LINEAR LED

Product code ML74

mondolux.com.au

MONDOLUX™

Installation Manual




Notes

1. Neonflex requires constant voltage with 24V DC safety input.
2. Do not connect the Neonflex directly to 240V.
3. Maximum running length of the Neonflex without voltage drop is 5m. For longer lengths contact Mondolux.
4. Should not be curving in diameter 200mm following radian.
5. Make sure when one end of is connected to the driver, the other end is disconnected. Otherwise, there is a risk of damaging.
6. Driver power calculation: $(\text{Length of LED}) \times (\text{Power}) \times (1.1) = \text{Minimum power requirement of the driver}$.
7. Cut through the scissors symbol on the Neonflex, for desired lengths. Do not cut while it is working.
8. Available as a 5m continuous roll, in anti static aluminum foil bag.
9. Heavy items must not be placed on the packaging box.
10. If you have any questions about this product, please contact Mondolux.



Care & Refinishing

Mondolux strongly recommends following cleaning procedures to maintain proper finish of the product.

- Do not use bleach or concentrated solvents under any circumstances.
- For Black finish: Wipe gently with a soft damp cloth or chamois. Do not use any abrasive compounds.

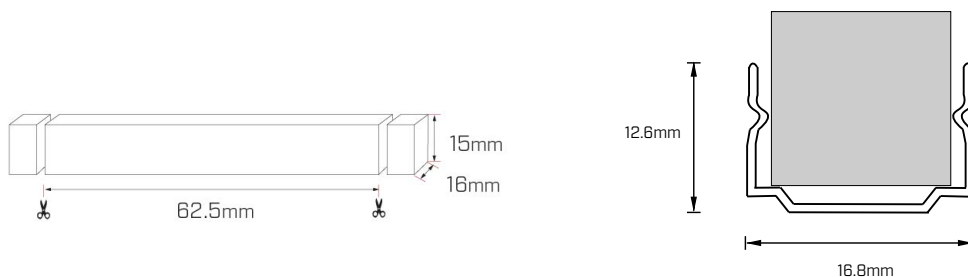

Max. Bend Diameter



Linea Neon Top Bendable RGBW 10W

LINEAR LED

Product code ML74

mondolux.com.au

MONDOLUX™

Installation Steps

1. Place the mounting clips on to the desired surface for installation and drill the screws to fix the mounting clips in place. See picture 1.
2. Click in the Neonflex into the mounting clips and assure its fixation. See picture 2.
3. Connect to the remote driver, in turn connecting it to the mains.
4. Installation is complete. See picture 3.

