

Electric pressure pot

Operating Specification


Service arrived once Wechat scanning
Please read this manual carefully before use and safety keep it

说明书技术要求					
选择项打 <input checked="" type="checkbox"/>			钉装方式	<input checked="" type="checkbox"/> 钉装	<input type="checkbox"/> 折页
编 码	16161100003063	制作	张波楠	材 质	80g双胶纸
工厂型号/客户型号	MY-PCS4039H/5039P/6039P			其他要求	黑色: K100 QS许可颜色: C100 M40 Y0 K15
客户名称	美的(与物料编码描述一致)			变更记录	A.1:20171031
环 保	<input checked="" type="checkbox"/> 环保	<input type="checkbox"/> 不环保			B.2:20171215 增加新型号YL50Easy202、YL50Easy203
印刷颜色	<input type="checkbox"/> 单色	<input checked="" type="checkbox"/> 双色	<input type="checkbox"/> 三色		<input type="checkbox"/> 四色
专 色	<input type="checkbox"/> 无	<input type="checkbox"/> 有 (<input type="checkbox"/> 1个 <input type="checkbox"/> 2个) <input type="checkbox"/> 3个			
尺寸规格 (单位: mm)	105X210mm				

Technical requirements in specification						
Select item mark <input checked="" type="checkbox"/>				Nail pack method	<input checked="" type="checkbox"/> Nail pack	<input checked="" type="checkbox"/> Fold page
NO.	16161100003063	Draw by	Zhang Linnan	Material	80g double glue paper	
Factory model/customer model	MY-PCS4039H/5039P/6039P			Other requirements	Black: K100 QS permitted color: C100 M40 Y0 K15	
Customer name	Midea(Same as he material number described)			Change records		
Environment protection	<input checked="" type="checkbox"/> environment protection	<input checked="" type="checkbox"/> Non environment protection			A. 1:20171031	
Printing color	<input checked="" type="checkbox"/> Single color	<input checked="" type="checkbox"/> Double color	<input checked="" type="checkbox"/> Three color	<input checked="" type="checkbox"/> Four color	B. 2:20171215 newly added model YL50Easy 202, YL50Easy 203	
Special color	<input checked="" type="checkbox"/> No	<input checked="" type="checkbox"/> Has(<input checked="" type="checkbox"/> 1 <input checked="" type="checkbox"/> 2) <input checked="" type="checkbox"/> 3				
Dimension specification(Unit:mm)	105 x 210mm					

产品简介 | 产品图以实物为准

部件展示

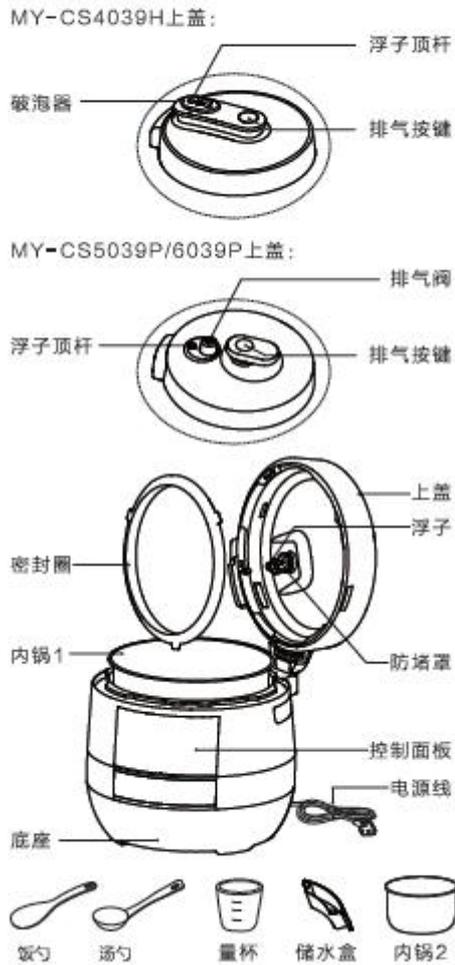


产品简介 Product introduction 产品图以实物为准 The product subject to entity
部件展示 Part exhibition MY-CS4039H 上盖 MY-CS4039H up cover 破泡器 Bleb broken
facility 浮子顶杆 Floater push pole 排气按键 Air venting key MY-CS5039P/603P 上盖:
MY-CS5039P/603 up cover: 破泡器 Bleb broken facility 浮子顶杆 Floater push pole 排气
按键 Air venting key 密封圈 Seal ring 内锅1 Interior pot 1 底座 Base 上盖 Up cover
浮子 Floater 防堵罩 Anti block cover 控制面板 Control panel 电源线 Power supply wire
饭勺 Rice spoon 汤勺 Soup ladle 量杯 1 Counting cup 1 储水盒 Water storage box 内锅2
Interior pot 2


产品简介

显示控制面板


MY-CS4039H:

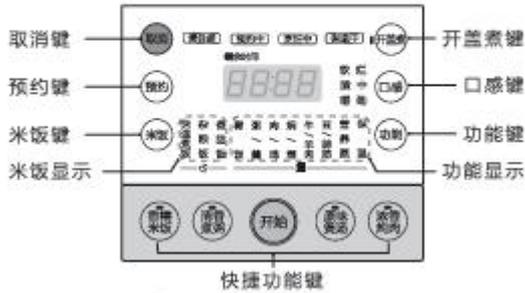

MY-CS5039P/6039P:

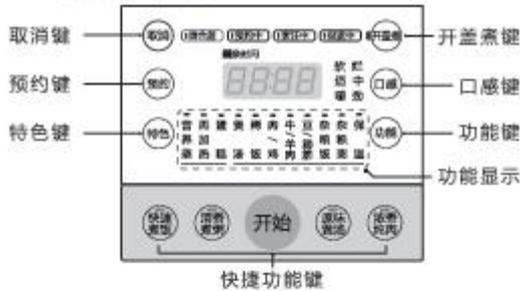

MY-YL50Easy202/YL50Easy203:

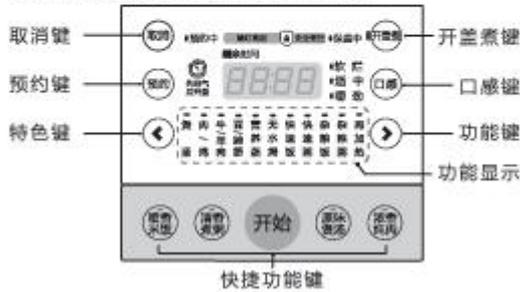

产品简介 Product introduction 显示控制面板 Indication control panel MY-CS4039H: 取消键 Cancel key 预约键 Order key 米饭键 Rice key 米饭显示 Rice indication 开盖煮键 Key of open cover cooking 口感键 Taste key 功能键 Function key 功能显示 Function indicate 取消 Cancel 请合盖 Please close cover 预约中 Ordering 烹饪中 Cooking 保温中 Keep warming 开盖煮 Open cover cooking 预约 Order 米饭 Rice 剩余时间 The rest time 软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 功能 Function 快速煮饭 Quick cooking rice 杂粮饭 Coarse rice 香甜饭 Fragrant and sweet rice 稀饭 Porridge 粥/羹 Porridge/thick soup 肉/鸡 Meat/Chicken 焖/焗 Braise/bake 牛/羊肉 Ox/sheep meat 豆/蹄筋 Bean/foot muscle 营养蒸 Nutrition steam 保温 Keep warm 快捷功能键 Quick function key

MY-CS5039P/6039P:

取消键 Cancel key 预约键 Order key 特色键 Characteristic key 开盖煮键 Key of open cover cooking 口感键 Taste key 功能键 Function key 功能显示 Function indicate 取消 Cancel 请合盖 Please close cover 预约中 Ordering 烹饪中 Cooking 保温中 Keep warming

开盖煮 Open cover cooking 预约 Order 米饭 Rice 剩余时间 The rest time 软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 功能 Function 营养蒸 Nutrition steam 再加热 Heating again 蛋糕 cake 煲汤 Decoct soup 稀饭 Porridge 肉/鸡 Meat/Chicken 牛/羊肉 Ox/sheep meat 豆/蹄筋 Bean/foot muscle 杂粮饭 Coarse rice 杂粮粥 Coarse congee 保温 Keep warm 快速煮饭 Quick cooking rice 清香煮粥 Delicate fragrance cooking congee 开始 Start 原味煲汤 Primary taste decoct soup 浓香炖肉 Aroma stew meat 快捷功能键 Quick function key


MY-YL50 Easy202/YL50 Easy203:

取消键 Cancel key 预约键 Order key 特色键 Characteristic key 开盖煮键 Key of open cover cooking 口感键 Taste key 功能键 Function key 功能显示 Function indicate 取消 Cancel 预约中 Ordering 绿灯亮起 Green lamp lighting 安全烹饪 Safety cooking 保温中 Keep warming 开盖煮 Open cover cooking 预约 Order 先排气后开盖 Exhaust air then open cover 剩余时间 The rest time 软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 煲汤 Decoct soup 肉/鸡 Meat/Chicken 牛/羊肉 Ox/sheep meat 豆/蹄筋 Bean/foot muscle 营养蒸 Nutrition steam 无水焗 Bake without water 快速饭 快速粥 杂粮饭 Coarse rice 杂粮粥 Coarse congee 再加热 Heating again 喷香米饭 Fragrant rice 清香煮粥 Delicate fragrance cooking congee 开始 Start 原味煲汤 Primary taste decoct soup 浓香炖肉 Aroma stew meat 快捷功能键 Quick function key

安装清洁

注意：清洁时确保电压力锅没有通电！

密封圈清洁



- ①从锅盖上，取出密封圈。 ②清洗密封圈并擦干，将其重新安装到位。

Installation cleaning Note: please make ensure the electric pressure pot power off when

cleaning!

Clean seal ring

- ① Pick out the seal ring from the pot cover.
- ② Clean the seal ring and wipe it to dry, and install it on position again

上盖清洁




- ① 清洗上盖、浮子、排气阀、防堵罩。
- ② 擦干上盖、浮子、排气阀、防堵罩，将其重新安装到位。

Clean up cover

- ① Clean up cover, floater, air venting valve and anti block cover.
- ② Wipe and dry the up cover, floater, air venting valve and anti block cover, and install it on position again.

破泡器清洁 (注: 仅MY-CS4039H产品有破泡器)

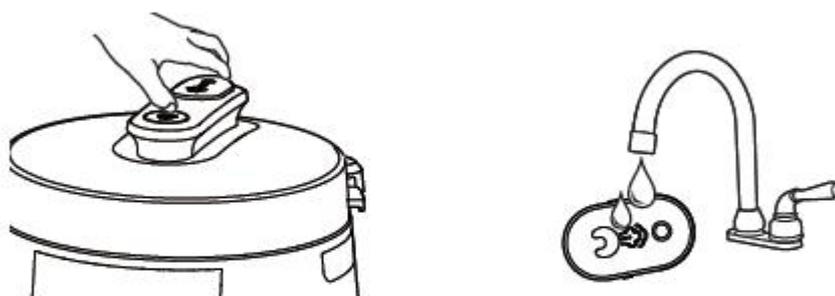

- ① 握住破泡器后端向上取出。
- ② 清洗破泡器并擦干,将其重新安装到位。

Clean bleb broken facility (Note: only product MY-CS4039H has bleb broken facility)


- ① Hold the rear end of bleb broken facility then upward picking out it.
- ② Wash and dry the

bleb broken facility, and install it on position again.

安装清洁

注意：清洁时确保电压力锅没有通电！

储水盒清洁



① 将储水盒水平拉出。

③ 将储水盒重新安装到位。



② 清洗储水盒并擦干。

Installation cleaning Note: please make ensure the electric pressure pot power off when cleaning!

Clean water storage box

- ① Parallel pull out water storage box.
- ② Wash the water storage box, wipe and dry it.
- ③ Install water storage box on position again.

锅体清洁



① 内外锅体的水、饭粒、杂物等需清理干净。

注：电压力锅浮子落下可开盖。



② 内锅底部清洁擦干。

Clean pot body

- ① The water, rice pellet and varies at interior and outer pot body need be fully cleaned.
- ②

Clean, wipe and dry the bottom of interior pot.

Note: can open the cover after the floater of electric pressure pot fallen.

使用说明

原味煲汤（以产品MY-CS5039P为例）

以原味煲汤为例，也可以根据需要进行选择其他菜单。

① 备汤料及清洗

② 放水到对应刻度

Operating introduce

Primary taste decoct soup (Sample as product MY-CS5039P)


Use primary taste decoct soup as sample, also can select other menu according to requirements.

① Prepare soup materials and cleaning ② Drop water to the corresponding scale



把汤料（如猪骨、玉米、胡萝卜等）洗净，切块放入内锅。

Wash and clean the soup materials (Example pig bone, corn and carrot), cut to be block then put into interior pot.

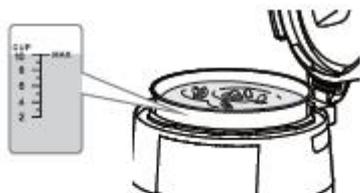

根据食材的多少，加水至相应水位线，也可根据个人喜好增减水量。

注:不可超过最大刻度线。

Add water to the corresponding water level line according to the quantity of food materials, also

can increase/reduce water volume according to private favour.

Note: can't exceed the max scale line.

使用说明

原味煲汤 (以产品MY-CS5039P为例)

③ 连接电源



插上电源插头，确保接触到位。

④ 选择功能



按“原味煲汤”键，进入煲汤状态。

⑤ 煲汤状态

⑥ 煲汤结束

Operating introduce

Primary taste decoct soup (Sample as product MY-CS5039P)

③ Connect the power supply Plug the power supply plug in, make ensure contact on position. 4 Select function Press the key of “Primary taste decoct soup”, enter into the status of decoct soup. 5 The status of decoct soup 6 Decoct soup finished



需要切换或取消当前功能，可按“取消”键，重新选择。

请合盖 Please close cover 预约中 Ordering 烹饪中 Cooking 保温中 Keep warming 开盖煮 Open cover cooking 剩余时间 The rest time 软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 口感 Taste



煲汤结束自动进入保温状态。

请合盖 Please close cover 预约中 Ordering 烹饪中 Cooking 保温中 Keeping warm 开盖煮 Open cover cooking 剩余时间 The rest time 软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 口感 Taste

Decocting soup finished and automatically enter into the status of keep warming.

预约稀饭（以产品MY-CS5039P为例）

例：预约“稀饭”，第二天早上 7:30 完成。（预约时间是指预约结束时间，预约时间到则烹饪完成。若现在北京时间晚上 10:30；则预约时间为 9:00）。


注：快速煮饭，香糯米饭，清香煮粥，原味煲汤，浓香炖肉，再加热，保温等功能不能进行预约，具体以实物为准。

Ordering porridge (Sample as product MY-CS5039P)

Example: ordering “porridge”, finish at the AM 7:30 next day. (The order time means the finish time of order time, finish cooking when order time arrived. If now is Beijing time night 10:30, then the order time is 9:00).

Note: quick cooking rice, can't order the functions of quick cooking rice, fragrance sticky rice, delicate fragrance cooking congee, primary taste decoct soup, aroma stew meat, heating again and keep warming, the details subject to entity.

① 把米和水备好

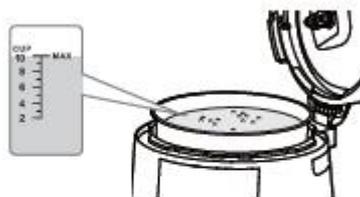

将淘洗干净的米放入内锅，
根据米量的多少，放水至相
应水位线，也可根据个人喜
好增减水量。

注:不可超过最大刻度线。

1 Prepare the rice and water well

Put the washed clean rice into the interior pot, Add water to the corresponding water level line according to the quantity of rice, also can increase/reduce water volume according to private favour.

Note: can't exceed the max scale line.

② 选择功能



合上盖，按“功能”键，
选择所需功能（如稀饭）；
也可按“特色”键选择其
他菜单。

2 Select function

软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 口感 Taste 再加热 Heating again
蛋糕 cake 煲汤 Decoct soup 稀饭 Porridge 肉/鸡 Meat/Chicken 牛/羊肉
Ox/sheep meat 豆/蹄筋 Bean/foot muscle 杂粮饭 Coarse rice 杂粮粥 Coarse congee
保温 Keep warm 功能 Function

Close the cover, press “Function” key, select the required function(example porridge); also can press “Characteristic” key select other menu.

使用说明

预约稀饭（以产品MY-CS5039P为例）

③ 预约时间设置



按“预约”键，进入预约状态，连续按“预约”键，调节预约时间。

④ 启动预约



按“开始”键，烹饪将会在指定时间完成。

Operating introduce

Ordering porridge (Sample as product MY-CS5039P)

3 Order time setting Press “Order” key, enter into the status of ordering, continue press “Order” key, adjust the order time. 4 Start order Press “Order” key, the cooking will finish at the appointed time.

口感选择（以产品MY-CS5039P为例）

以煲汤为例，也可以选择稀饭、肉/鸡、牛/羊肉、豆/蹄筋、杂粮饭、杂粮粥。注：快速煮饭、清香煮粥、原味煲汤、浓香炖肉、营养蒸、再加热、蛋糕、保温功能不能选择口感。

Taste selection (Sample as product MY-CS5039P)

Sample as decoct soup, also can select porridge, meat/chicken, ox/sheep meat, bean/foot muscle, coarse rice and coarse congee. Note: can't select the taste at the functions of quick cooking rice, delicate fragrance cooking congee, primary taste decoct soup, aroma stew meat, nutrition steam, heating again, cake and keep warming.



Correct method of accounting rice Incorrect method of accounting rice



软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 口感 Taste 蛋糕 cake 煲汤
Decoct soup 稀饭 Porridge 肉/鸡 Meat/Chicken 牛/羊肉 Ox/sheep meat 豆/蹄筋
Bean/foot muscle 杂粮饭 Coarse rice 杂粮粥 Coarse congee 保温 Keep warm 功能
Function

- ① 用量杯取米，把米淘洗干净。
请勿用钢丝球清洗内锅，
以免刮伤内锅涂层。

Use counting cup pick rice, wash clean the rice.

Please don't use steel wire ball clean the interior pot, to avoid scratch damage the coated layer of interior pot.

- ② 合上盖，按“功能”键，
选择所需功能（如煲汤）；
也可按“特色”键选择其
他菜单。

Close the cover, press “Function” key, select the required function(example decoct soup); also can press “Characteristic” key select other menu.



软烂 Soft & mash 适中 Medium 嚼劲 Chew strength 口感 Taste 蛋糕 cake 煲汤
Decoct soup 稀饭 Porridge 肉/鸡 Meat/Chicken 牛/羊肉 Ox/sheep meat 豆/蹄筋

Bean/foot muscle 杂粮饭 Coarse rice 杂粮粥 Coarse congee 保温 Keep warm 功能 Function

- ③ 按“口感”键，选择所需口感，如“适中”。

3 Press “Taste” key, select the required taste, example “Medium”.

- ④ 按“开始”键，开始烹饪。

4 Press “Start” key, start cooking.

使用说明

再加热（以产品MY-CS5039P为例）

注：使用此功能时，米饭最大量不超过4刻度。



- ① 打松米饭后，洒上50-80克水，按“功能”键选择“再加热”功能。



- ② 按“预约”键调整加热时间（可调范围为5-20分钟），再按“开始”键，开始加热。

Operating introduce

Heating again(sample as MY-CS5039P)

Note: the max volume of rice can't exceed scale 4 when use this function.

预约 Order 特色 Characteristic 营养 Nutrition 再加热 Heating again

1 After loose the rice, sprayed 50-80g water, press “Function” key select “Heating again” function.

营养蒸 Nutrition steam 再加热 Heating again 蛋糕 cake 煲汤 Decoct soup 稀饭

Porridge 肉/鸡 Meat/Chicken 牛/羊肉 Ox/sheep meat 豆/蹄筋 Bean/foot muscle
 杂粮饭 Coarse rice

2 Press "Order" key adjust the heating time(Adjustable scope is 5-20minutes), press "Start" key again then start heating.

如何使用水位线

下表中电压力锅煮饭、煮粥、稀饭米水比例对照表，仅供参考：

功能	饭			煮粥/稀饭		
量杯	2	4	6	0.5	1	1.5
水量 (刻度)	2	4	6	2-3	4-5	7-8

●用户也可根据个人口味适当调节比例。

How to use the water scale line

The below scale contrast table of water and rice for electric pressure pot cooking rice, congee and porridge, only for your reference:

Function	Rice			Cooking congee/porridge		
Counting cup	2	4	6	0.5	1	1.5
Water volume(Scale mark)	2	4	6	2-3	4-5	7-8

●The user can suitable adjust the scale according to private taste.

Safety notices

Special reminding

To guarantee safety using, avoid to hurt you and other people and property loss, please must follow the below safety notices.

This product not considered the below situation:

-- The children not be take care and deformed man use the facilities

--The situation that children play the instruments



Means the content of [Forbidden]



Means the content of [Force]



Warning the items which maybe caused human hurt or dead



Note the items which maybe caused slight wound or property loss

Operating notices

⊘ Don't use this facilities cooking the food which easy to block the air exhaust hole.

Sheet shape food(example laver, cabbage) or band shape food (example sea-tangle), chip type food(example corn dregs), avoid to caused accident or pressure pot damaged.

⊘ Air venting valve automatic exhaust air when working, please don't make hands or face close to the steam hole, avoid to be scald.

Don't use wipe cloth and other matters cover the air exhaust hole during cooking process.

⊘ Please use 220V~50Hz AC power supply socket.

If use non 220V~50Hz civil power or special power supply, will caused fire or electric shock.
Exist fire risk if use bad quality socket adapter.

⊘ Please fix time check the air exhaust hole and floater, make ensure not be blocked.

⊘ Please don't move the electric pressure pot during cooking process.

To avoid pot cover unexpected open and caused steam scald or make soup in the pot overflow;
or caused touch the operating keys caused electric pressure pot stop working.

⊘ Please don't change building

Except the professional technicians, the other all people can't disassemble, maintain it, to avoid caused fire, electric shock and wounded.

⊘ Please don't insert the metal chips, pin, steel wire and other matters in the gap of electric pressure pot, to avoid caused electric shock and wounded.

⊘ Please plug out the plugs when not use the product, otherwise, it maybe caused electric leak, fire, failure, etc.

Safety notices

⊘ Don't place the electric pressure pot on the place where not level and steady, wet or close to other fire source, heat source (example stove).

Avoid burning caused fire or product damage.

⊘ Please don't add any heavy matters on air exhaust valve

Can't add any heavy matters on air exhaust valve or use other matters place it.

⊘ Please use the Media special power supply wire

If power supply soft wire damaged, must be renewal by professional technicians from manufacture, maintain department or other similar departments.

⊘ The product only limit use indoor, and the best distance to other kitchen electrics above

30cm.

 Please don't use wet hands plug in/out the plug, avoid wound. When plug out the plug, nip the plug and plug out, can't pull or drag the power supply wire, frequently clean the insert sheets of plug.

 Please don't make the children operating and use alone, place at where babies can't touch. Avoid to occur dangerous accidents like electric shock, scald, etc.

 Never use other pot cover heating
Strictly forbid use other pot cover when heating, strictly forbid use non-original pot cover during power on, otherwise, it will caused bad performance or potential safety failure.

 Only can open the container after pressure fully released.

 Please lift the pot body handle when transport or move product.
Never lift the knob of open cover directly, avoid damage product, please don't transport or move the product under cover open status, avoid damages.

 Can't place the interior pot on other instrument and heating
The standard configured interior pot of this product forbid use in other application, avoid caused interior pot deformation and affect use.

 Product can't be soak into water or water spraying.

 Need alone use the socket with grounding above rated current 10A.

If joint use with other electrics, there will has dangerous that socket abnormal caused fire.

 Please don't open the pot cover when working

Only can open the pot cover after cooking finished till pressure fully released. Please don't force open if difficult to open cover, otherwise, maybe caused scald or other hurts.

Safety notices

 Please maintain or renewal parts at the maintain grids where appointed by Media, please don't working under that outer connect timer or remote control system method.
When maintaining, forbid short connect heat fuse caused heat protection, easily caused fire when heating abnormally.

 This pressure pot only can use the standard configure interior pot, avoid over heating and

abnormal.

 Don't use solid objects impact interior pot, avoid deformation.

 Please don't use electric pressure pot if seal ring deformation, damage or interior pot deformation, avoid happen accident.

 Some surface of product will be high temperature when working, strictly forbid use hands touch, avoid scalding.

 Please don't use hand touch interior pot directly during using or finish use just now, avoid high temperature scalding.

 Strictly forbid the power supply wire touch the visual metal parts on the outer pot cover, otherwise, maybe caused abnormal working.

Warmly reminding

① Under the condition that not complete indoor grounding device, sensitive people maybe feeling the response electric, advise check whether reliable indoor grounding device, or not touch metal outer shell and interior pot after powered on.

② Before use the pressure pot, please check whether install interior pot, air exhaust valve, seal ring and anti block cover on position, avoid cause accident.

③ Before use, please clean the foreign matters like water drops, rice pellets between interior pot and heating tray first, avoid caused overheat or short circuit.

④ Must wipe and dry the water on the surface of interior pot before use electric pressure pot, avoid caused failure.

⑤ Should be natural cooling when cooking congee or various beans and reach to non pressure, don't hand exhaust air.

⑥ If product picture not be same as entity, subject to entity.

⑦ Please don't cooking next lot immediately when finish cooking current lot, should waiting above 15 minutes, waiting the facility body cooled to be room temperature.

⑧ Please don't use solid project, sharp metal products fill rice and clean, avoid scratch damage interior pot.

⑨ Cooking volume can't exceed the max water level line.

⑩ Maybe interim or directly exhaust air during product working process, this is normal appearance.

11 Please fix time wash and clean air exhaust valve, seal ring, anti block cover and places platform surface.

Maintenance service

Working time of common function gear

Different working and cooling time of each functional gears; a little changes of working time according to the different power supply voltage, food volume, water volume, quality of rice and

water; more cooking volume more longer time at corresponding working time. More bigger cooking volume more longer corresponding working time. The below table is the working time of this product common functions under the default status, only for your reference. Non common functions(heating again, cake and nutrition steam, etc) has strong freedom, time subject to the actual cooking time.

Time(minutes)	Quick cooking rice	Delicate fragrance cooking congee	Primary taste decoct soup	Aroma stew meat	Coarse rice	Porridge	Decoct soup	Coarse congee	Meat/C hicken	Ox/sheep meat	Bean/foot muscle
Interior pot scale mark											
Scale mark 2											
Scale mark 5											
Scale mark 10											

Double it has failure problems

When you think the product has failure, please check the below situation before send to the maintain grids, and confirm.

Abnormal situation	Possible reasons	Corresponding methods
Can't close cover	Floater blocked	Close cover after pull down floater
	Seal ring not installed on position	Arrange seal ring, close the cover after installed on position
Can't open cover	Floater valve not fallen down after exhaust air	Use chopsticks lightly press floater valve
	Has pressure in pot	Waiting till the safety eye on pot cover fallen
Pot cover leak air	Not place seal ring or not installed on position	Place well the seal ring according to requirements
	Stick foreign matters on seal ring	Clean seal ring
	Seal ring damaged	Renewal seal ring
Floater valve leak air	Seal pad of floater valve stick foreign matter	Clean seal pad of floater valve
	Seal ring of floater valve abraded	Send to maintain place to renewal pad of floater valve
Floater valve can't rise up	Too small food and water in the pot	Place food and water according to stipulates
	Pot cover or air exhaust valve leak air	Send to maintain place for check and maintenance
	Used voltage < Power grid voltage	Normal, longer time cooking rice
Air venting valve continue venting air when working	Air venting valve not be placed at the seal position	Pressed down the air venting key, cancel micro pressure function or send to maintain place for check and maintenance
	Pressure control invalid	
	Pressed down the micro pressure key	
Heating tray not heating when at working status	Cover not be closed on position	Close cover again
	Heating tray failure	Send to maintain place for check and

	Electric circuit failure	maintenance
“Please close cover” lamp lighting when product at the withstanding status, select function key no responding	Cover not be closed on position	Close cover again
Not ripe /too hard cooked rice	Too small filled water	Suitable add water volume
	Open cover early	Open cover of air exhaust after 5minutes cooking finished
Too soft cooked rice	Too many filled water	Suitable reduce water volume

Maintenance service

Abnormal appearance self check

Indicate abnormal reason judgment, please authorized local distributor or service grids to do maintenance or installation.

Status of indicate lamp	Abnormal indicate	Possible reasons	Corresponding methods
Indicate	EE	Open circuit at bottom sensor	Please send to maintain place for check and maintenance
Indicate	EE	Open circuit at bottom sensor	Please send to maintain place for check and maintenance
Indicate	EE	Overheating protection	Check whether has water or food, after user adjusted it, then can normally use after protection reminding disappeared; otherwise, send to maintain place for check and maintenance
Indicate	EE	Pressure switch open circuit	Please send to maintain place for check and maintenance

Electric principle diagram

温度保险丝 Temperature fuse 温度保险丝 Temperature fuse 插座 Socket 压力开关 Pressure switch 电热盘 Electric heating tray 电源板供电 Power supply plate powered on 电源板 Power supply plate 连接线 Wiring line 开合盖检测开关 Open/close cover detection switch 底部温度传感器 Bottom temperature sensor 显示板 Indicate plate

Technical parameters

Model	Rated voltage/rated frequency	Rated frequency	Volume	Working pressure

Environment protection list

The name and content of the harmful matters or elements in product

Part name	Poisonous and harmful matters or elements					
	Lead (Pb)	Mercury(Hg)	Cadmium(Cd)	Hexavalent chromium(Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated diphenylethers(PBDE)
Steam valve assembly						
Up cover assembly						
Anti overflow cover plate						
Handle						
Interior pot						
Exterior pot						
Heating tray assembly						
Rice spoon/Soup ladle						
Counting cup						
Outer shell						
Bottom cover						
PCB assembly						
Power supply wire assembly						

This table drawn up according to the stipulates of SJ/T 11364.

○ : means this harmful matters content in all equal quality materials of this part all are below the stipulated volume limited requirements in GB/T 26572.

X: means this harmful matters content at least in one equal quality materials of this part all are exceed the stipulated volume limited requirements in GB/T 26572.

Product qualification certificate

Check date: See the produce lot number

Check conclusion: Qualified

Inspector number: Check A1



本产品所含食品用塑料工具
生产许可证编号：粤XK16-204-00125

生产许可 Production permission

本产品所含食品用塑料工具 The food used plastic tools contain in this product

生产许可证编号：粤 XK16-204-00125 Production permission certificate number: Guangdong XK16-204-00125

生产日期见生产批号前6位（年/月/日）



本资料上所有内容均经过认真核对，如有任何印刷错漏或内容上的误解，可向本公司咨询。

注：产品若有技术改进，会编进新版手册中，恕不另行通知；产品外观、颜色如有改动，以实物为准。

产品执行标准：GB4706.1-2005 GB4706.19-2008
Q/MD 007—2014

13

The produce date please see the front 6 bytes at the produce lot number(date)

All contents on this datum all have been checked and certified carefully, can consult our company if any printing error or misunderstanding of contents.

Note: will draw up in new edition manual if product has technical improvement, please understand we not specially inform; subject to entity if changes at appearance and color.

Product execute standards: GB706.1-2005 GB4706.19-2008 Q/MD 007-2014

MY-CS4039H product's food contact list:

This product and food contact materials all are in accordance with the requirements of the series standard of GB4806.1-2016:

Food contact use			
Part name	Material	Execute standards	Remark
Spring washer, anti block cover, base of anti block cover	Stainless steel 06Cr19Ni10		
Pot cover	Stainless steel 10Cr17		/

Floater, floater base, air exhaust valve core, anti block cover	Aluminum alloy		Can't touch acid foods
Seal ring, air exhaust valve, push awl	Polydimethylsiloxane		
Interior pot	Teflon coated layer/aluminum alloy		Coated layer used temperature not exceed 250°C
Interior pot	Enamel/cold rolling steel plate		/
Rice spoon, soup ladle	Polypropylene(Propylene copolymer)/Propylene ethylene copolymer		PP
Counting cup	Polypropylene(Noblen)		PP

Aluminum alloy(wt.%): Si≤0.6, Fe≤0.7, Cu≤0.3, Mn≤1.5, Mg≤0.9, Zn≤0.15, Cr≤0.1

Steel plate(wt.%): C≤0.2, Mn≤0.6, P≤0.05, S≤0.04

MY-CS5039P/6039P/YL50Easy202/YL50Easy203

Product's food contact list:

This product and food contact materials all are in accordance with the requirements of the series standard of GB4806.1-2016:

Food contact use			
Part name	Material	Execute standards	Remark
Spring washer, anti block cover, base of anti block cover	Stainless steel 06Cr19Ni10		
Pot cover	Stainless steel 10Cr17		/
Floater, floater base, air exhaust valve core, anti block cover	Aluminum alloy		Can't touch acid foods
Seal ring, air exhaust valve, push awl	Polydimethylsiloxane		
Interior pot	Teflon coated layer/aluminum alloy		Coated layer used temperature not exceed 250°C
Interior pot	Enamel/cold rolling steel plate		/
Multiple application ladle	Polypropylene(Propylene copolymer)/Propylene ethylene copolymer		PP
Counting cup	Polypropylene(Noblen)		PP
Pot cover self lock sliding block	Stainless steel Y12Cr19Ni19		

Aluminum alloy(wt.%): Si≤0.6, Fe≤0.7, Cu≤0.3, Mn≤1.5, Mg≤0.9, Zn≤0.15, Cr≤0.1

Steel plate(wt.%): C≤0.2, Mn≤0.6, P≤0.05, S≤0.04

TEL 400-8899-315

Guangdong Media Life Electric Manufacture Co., Ltd

Address: NO.19, Sanle road, Beijiao town, Shunde district, Foshan city, Guangdong province

Zip code:528311

Website: www.midea.com

Part material number:16161100003063