


Extraction hood with air-cooled condenser. Prearranged electric models only. Use collector CCE for external connection. For ovens mod. 062 use exclusively floor stand and cabinets mod. BSA021, BSK021, BSC210.

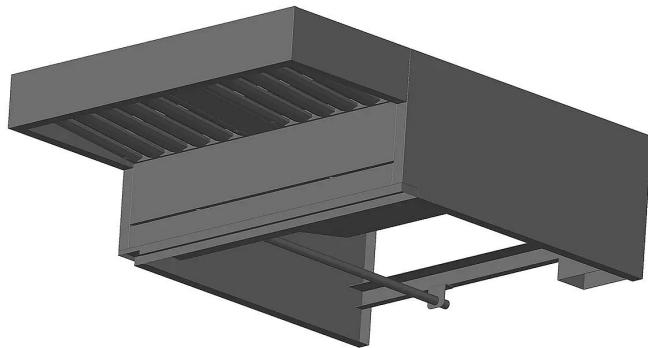

The vapour condensation system consists of a finned labyrinth that allows for the development of a very large exchange surface, positioned in such a way as to appropriately force the air flow path, with the purpose of condensing the vapours coming from the cooking chamber and from oven outlet when the door is opened.

The extent of the surface, combined with the speed of the air sucked in from the outside, allows for the vapours to be condensed without the need for additional external intervention to cool the condenser (e.g. water), since the thermal balance in normal oven use (verified in the laboratory) is observed.

To condense vapours coming from the cooking chamber, an air flow rate of about half the maximum flow rate of the extractor is sufficient, whereas to condense vapours coming from the oven outlet, the maximum flow rate is used automatically when the door is opened.



Dimensions

Width	mm 1072	inch 42.2
Depth	mm 1192	inch 46.9
Height	mm 320	inch 12.6
Packaging width	mm 1240	inch 48.8
Packing depth	mm 1240	inch 48.8
Packaging height	mm 470	inch 18.5
Net weight	kg 45	lbs 99.2
Gross weight	kg 61	lbs 134.5
Volume	m ³ 0.411	ft ³ 14.5
Packing volume	m ³ 0.723	ft ³ 25.5
Condensate drain	mm 20	inch 0.8
Air exhaust	mm 230 x 96	inch NaN
Flow rate max	m ³ / h 900	ft ³ / h

Power supply


Power supply voltage	1N-AC 230 V
Electrical absorption	A 1,3
Frequency	Hz 50/60
Total electric power	kW 0,3

Emissions

Noisiness	db 70
-----------	-------

STRUCTURAL CHARACTERISTICS

- CONSTRUCTION IN FULL AISI 304
- TWO-SPEED EXTRACTION MOTOR IN AISI 304
- AIR-COOLED CONDENSER
- AUTOMATIC CONTROL
- LOW SPEED DURING COOKING
- AUTOMATIC HIGH SPEED ACTIVATION FOR 30° WHEN DOOR IS OPENED
- FILTERS IN AISI 304, CAN BE REMOVED FOR CLEANING
- DIRECT POSITIONING ON THE OVEN LID
- CAN BE ATTACHED TO THE CENTRALISED EXTRACTION SYSTEM

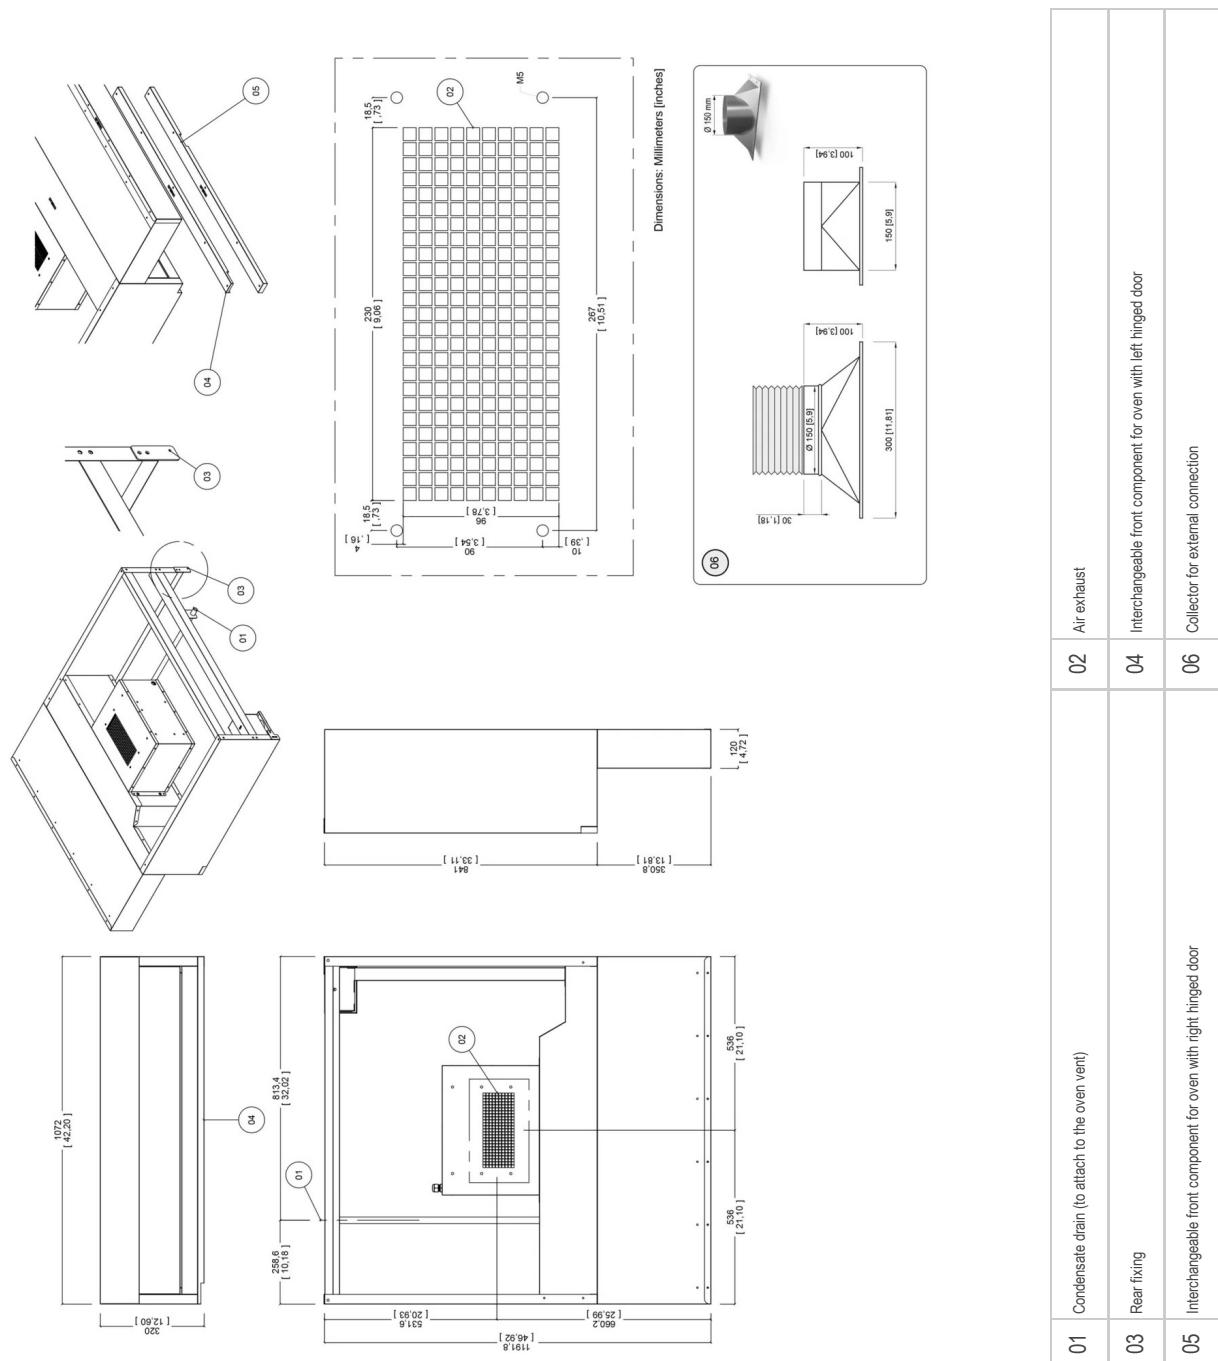

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice

LAINOX

Lainox Ali Group S.r.l.
Via Schiapparelli 15
Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) · Italy

Tel +39 0438 9110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com



EN



9/9/2024