


Extraction hood with air-cooled condenser. Prearranged electric models only. Use collector CCE for external connection.

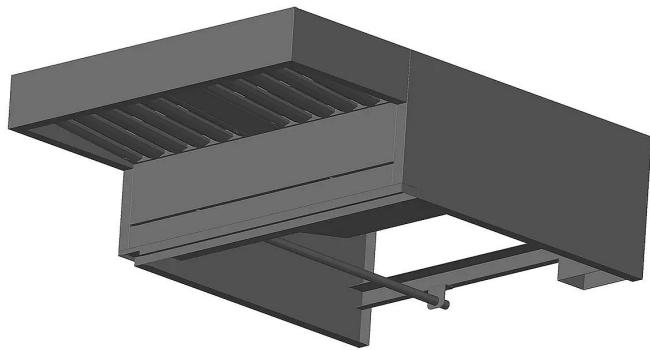

The vapour condensation system consists of a finned labyrinth that allows for the development of a very large exchange surface, positioned in such a way as to appropriately force the air flow path, with the purpose of condensing the vapours coming from the cooking chamber and from oven outlet when the door is opened.

The extent of the surface, combined with the speed of the air sucked in from the outside, allows for the vapours to be condensed without the need for additional external intervention to cool the condenser (e.g. water), since the thermal balance in normal oven use (verified in the laboratory) is observed.

To condense vapours coming from the cooking chamber, an air flow rate of about half the maximum flow rate of the extractor is sufficient, whereas to condense vapours coming from the oven outlet, the maximum flow rate is used automatically when the door is opened.



Dimensions

Width	mm 852	inch 33.5
Depth	mm 1152	inch 45.4
Height	mm 320	inch 12.6
Packaging width	mm 1210	inch 47.6
Packing depth	mm 1060	inch 41.7
Packaging height	mm 540	inch 21.3
Net weight	kg 40	lbs 88.2
Gross weight	kg 56	lbs 123.5
Volume	m ³ 0.316	ft ³ 11.2
Packing volume	m ³ 0.693	ft ³ 24.5
Condensate drain	mm 20	inch 0.8
Air exhaust	mm 230 x 96	inch NaN
Flow rate max	m ³ / h 900	ft ³ / h

Power supply









Power supply voltage	1N-AC 230 V
Electrical absorption	A 1,3
Frequency	Hz 50/60
Total electric power	kW 0,3

Emissions

Noisiness	db 70
-----------	-------

STRUCTURAL CHARACTERISTICS

- CONSTRUCTION IN FULL AISI 304
- TWO-SPEED EXTRACTION MOTOR IN AISI 304
- AIR-COOLED CONDENSER
- AUTOMATIC CONTROL
- LOW SPEED DURING COOKING
- AUTOMATIC HIGH SPEED ACTIVATION FOR 30° WHEN DOOR IS OPENED
- FILTERS IN AISI 304, CAN BE REMOVED FOR CLEANING
- DIRECT POSITIONING ON THE OVEN LID
- CAN BE ATTACHED TO THE CENTRALISED EXTRACTION SYSTEM

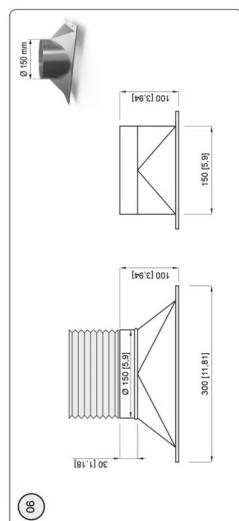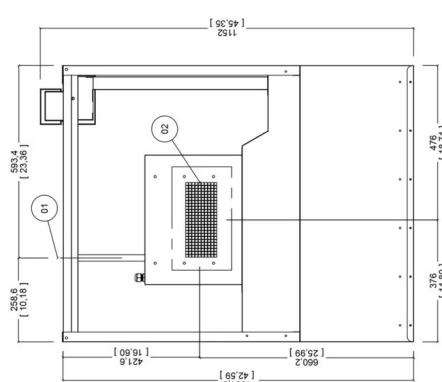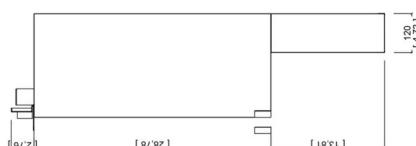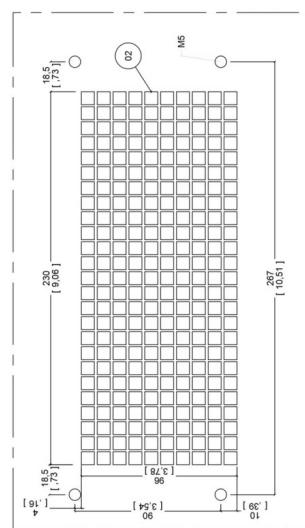

01	Condensate drain (to attach to the oven vent)	02	Air exhaust
03	Rear fixing	04	Interchangeable front component for oven with left hinged door
05	Interchangeable front component for oven with right hinged door	06	Collector for external connection

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice.

LAINOX Lainox Ali Group S.r.l.
Via Schiapparelli 15
Z.I. S. Giacomo di Veglia
32020 Vittorio Veneto (TV) - Italy

Tel +39 0438 9110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com



EN

9/9/2024