

Extraction hood with air-cooled condenser. Prearranged models only. Use collector CCE for external connection.



The vapour condensation system consists of a finned labyrinth that allows for the development of a very large exchange surface, positioned in such a way as to appropriately force the air flow path, with the purpose of condensing the vapours coming from the cooking chamber and from oven outlet when the door is opened.

The extent of the surface, combined with the speed of the air sucked in from the outside, allows for the vapours to be condensed without the need for additional external intervention to cool the condenser (e.g. water), since the thermal balance in normal oven use (verified in the laboratory) is observed.

To condense vapours coming from the cooking chamber, an air flow rate of about half the maximum flow rate of the extractor is sufficient, whereas to condense vapours coming from the oven outlet, the maximum flow rate is used automatically when the door is opened.



#### Dimensions

Width	mm 510	inch 20.1
Depth	mm 1033	inch 40.7
Height	mm 300	inch 11.8
Packaging width	mm 1120	inch 44.1
Packing depth	mm 650	inch 25.6
Packaging height	mm 560	inch 22.0
Net weight	kg 25	lbs 55.1
Gross weight	kg 32	lbs 70.6
Volume	m3 0.158	ft3 5.6
Packing volume	m3 0.389	ft3 13.7
Condensate drain	mm 20	inch 0.8
Air exhaust	mm 230 x 97	inch NaN
Flow rate max	m3 / h 900	ft3 / h

#### Power supply


Power supply voltage	1N-AC 230 V
Electrical absorption	A 1
Frequency	Hz 50/60
Total electric power	kW 0,3

#### Emissions

Noisiness	db 70
-----------	-------

#### STRUCTURAL CHARACTERISTICS

- AIR-COOLED CONDENSER
- AUTOMATIC CONTROL
- LOW SPEED DURING COOKING
- AUTOMATIC HIGH SPEED ACTIVATION FOR 30" WHEN DOOR IS OPENED
- DIRECT POSITIONING ON THE OVEN LID
- CAN BE ATTACHED TO THE CENTRALISED EXTRACTION SYSTEM
- FILTERS IN AISI 430, CAN BE REMOVED FOR CLEANING
- CONSTRUCTION IN FULL AISI 430
- TWO-SPEED EXTRACTION MOTOR IN AISI 430

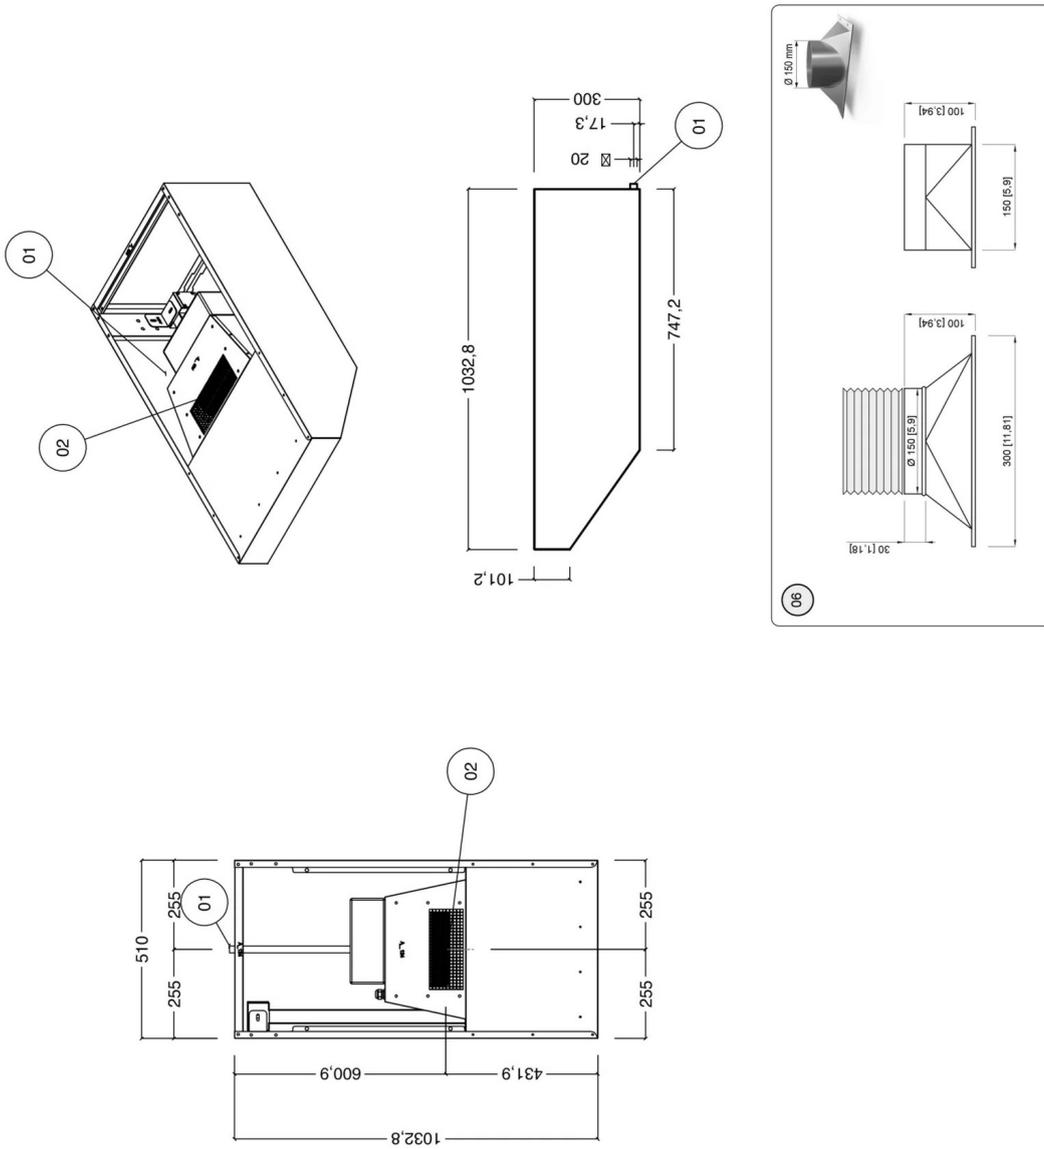

01	Condensate drain (to attach to the oven vent)
02	Air exhaust
06	Collector for external connection

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice