

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1013029

MODELLO
Q70TP/E800

SERIE
QUEEN 7

GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs. As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Chrome molybdenum polished steel cooking plate 1.8 cm thick that is crushproof at high temperatures and also suitable for direct cooking. Perimeter grease collection gutter with drain hole.

Plate heating (4 zones) by means of 4 2.5 kW heating elements.

Temperature control of heating elements by thermostat, operated by means of ergonomic recessed and inclined knobs.

Oven - General Features

Stainless steel cooking chamber (53x70x30cm), thermally insulated and equipped with 3 anti-tip guides for 1/1 and 2/1 reduced gastronom containers.

Thick cast iron radiant sole for effective heat distribution.

Stainless steel door and counter door, perfectly insulated and mounted on self-balancing hinges.

Ergonomic full-length, thermally insulated handle.

Electric oven

Groups of stainless steel heating elements placed on the ceiling and under the sole of the firing chamber.

Thermostatic temperature control in the chamber from 100°C to 300°C. Various connection possibilities.

Warning light indicating "equipment under voltage."

Indicator light indicating that the set temperature has been reached.

4 independent cooking zones.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

CODICE
CR1013029MODELLO
Q70TP/E800SERIE
QUEEN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1013029
DEFINITION	Q70TP/E800 TUTTAPIASTRA ELETTRICO TOP
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	250 mm
NET WEIGHT	87 Kg
VOLUME (net)	0.14
PACKAGE LENGTH	850 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,412 m ³
GROSS PACKING WEIGHT	97.6 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	10 kW
IP GRADE	IPX4
CERTIFIED MODEL	Q70TP/E800

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:




CODICE
CR1013029

MODELLO
Q70TP/E800

SERIE
QUEEN 7

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MAREN IN cm - DIMENSIONES EN cm

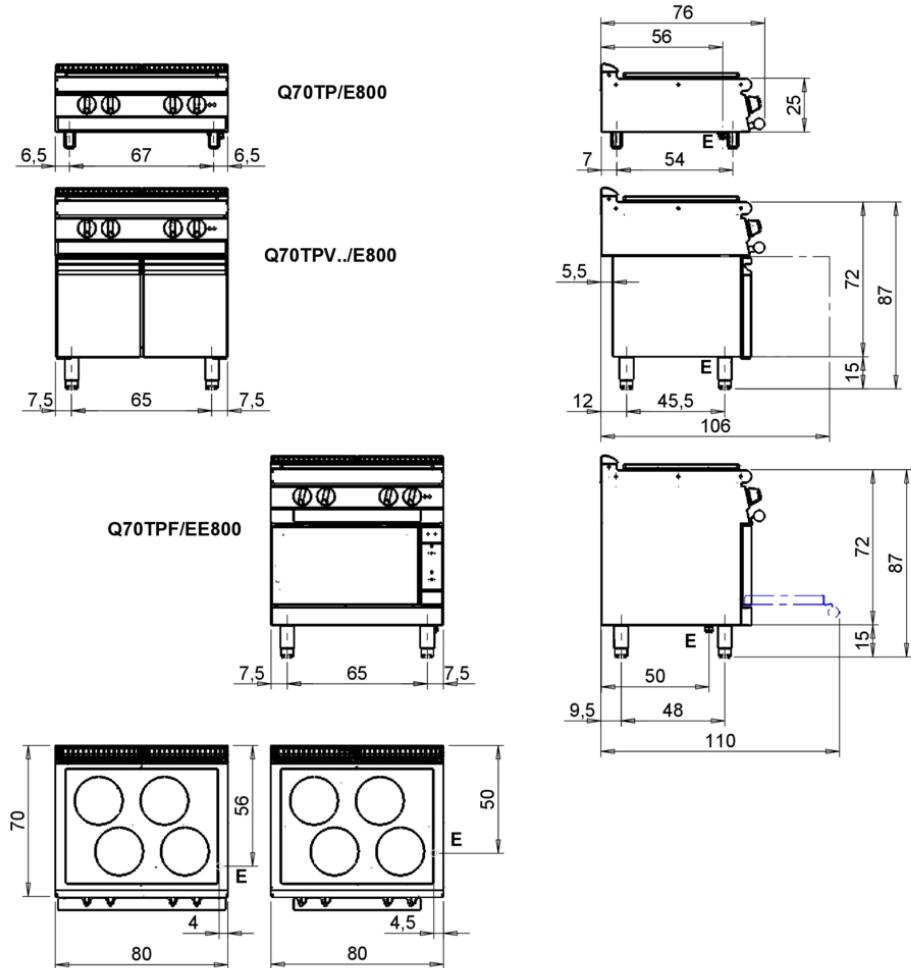

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwarte - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga águia	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Waternaansluiting - Junção alimentação águia
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck venti - Souape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenuurruimte - Descarga de agua na marmita com Sistema de aquecimento indireto		
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1013029

MODELLO
Q70TP/E800

SERIE
QUEEN 7

PRODUCT'S RANGE PLUS



Plate cantilevered 18 mm from the plane, with temperature control from 50° to 400°C



4 independent cooking zones.