

# INDIRECT GAS BOILING PAN 150lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356119

MODELLO  
Q90PF/GI150S

SERIE  
QUEEN 9

## GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with a thickness of 2 mm.

AISI 304 stainless steel tanks with AISI 316 bottom.

Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

Frontal drain by means of 2" chrome-plated brass faucet.

Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).

Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.

Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Stainless steel tank with aisi 319 bottom

Possibility of hot or cold water loading

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# INDIRECT GAS BOILING PAN 150lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356119

MODELLO  
Q90PF/GI150S

SERIE  
QUEEN 9

## Technical Information

| SPECIFICATION            | DATA                                     |
|--------------------------|------------------------------------------|
| MATERIAL                 | CR1356119                                |
| DEFINITION               | Q90PF/GI150 S PEN.GAS M80 IND.C/VAL 150L |
| COMMERCIAL LINE          | QUEEN                                    |
| SUPPLY                   | MIXED                                    |
| DIM. WIDTH               | 800 mm                                   |
| DIM. PRODUCTIVITY        | 900 mm                                   |
| DIM. HEIGHT              | 870 mm                                   |
| NET WEIGHT               | 156 Kg                                   |
| VOLUME (net)             | 0.626                                    |
| PACKAGE LENGTH           | 860 mm                                   |
| PACKAGE WIDTH            | 1020 mm                                  |
| PACKAGING HEIGHT         | 1150 mm                                  |
| PACKAGE VOLUME           | 1,140 m3                                 |
| GROSS PACKING WEIGHT     | 177.2 Kg                                 |
| STANDARD POWER SUPPLY    | 220-240V 1N                              |
| FREQUENCY                | 50 Hz                                    |
| ELECTRICAL POWER         | 0.275 kW                                 |
| GAS POWER                | 24                                       |
| GAS POWER (G25.3/25mbar) | 22,50                                    |
| IP GRADE                 | IPX5                                     |
| CAPACITY                 | 150 litri                                |
| CERTIFIED MODEL          | Q90PF/GI150                              |

# INDIRECT GAS BOILING PAN 150lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1356119

MODELLO  
Q90PF/GI150S

SERIE  
QUEEN 9

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MÅTEN IN mm

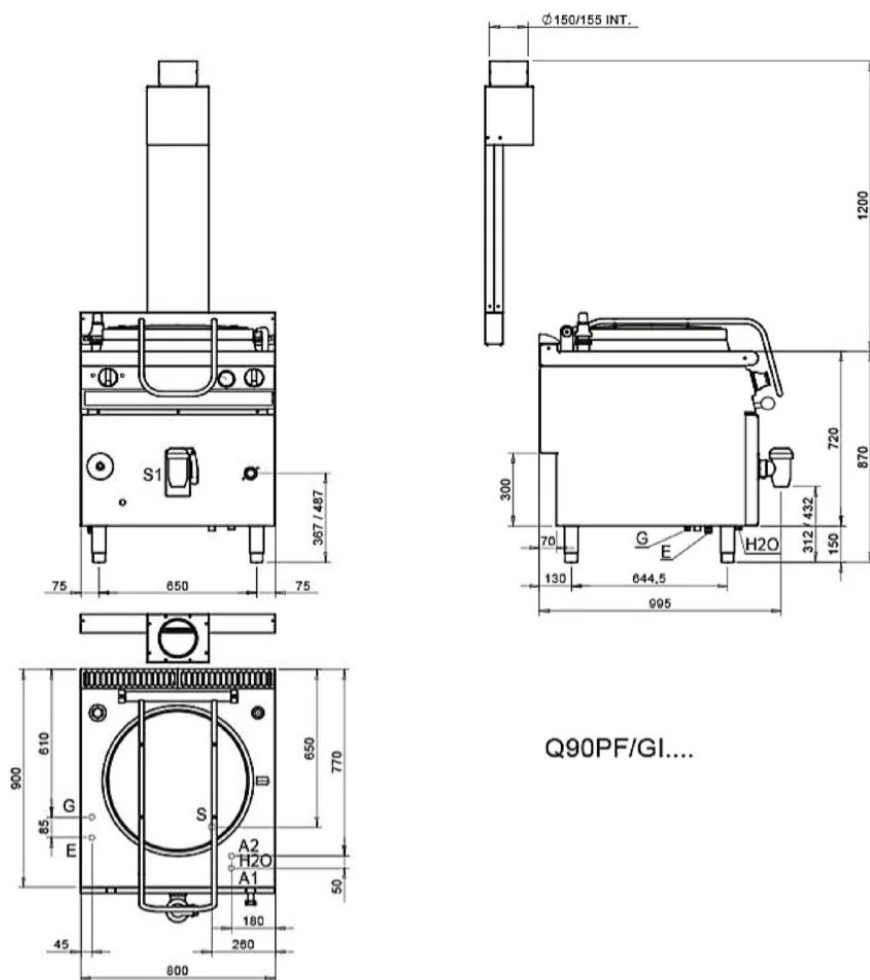

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting  
A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm EN ISO 228-1 G 3/4  
A2 = Fredda - Kalt - Cold - Froid - Fria - Koude EN ISO 228-1 G 3/4  
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Elektrische kabelwartel  
G Attacco arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas -  
Gasaansluiting EN10228-1 R 1/2; EN ISO 228-1 G 1/2 (DK)  
S Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain -  
Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water  
tussenruimte EN ISO 228-1 G 1  
S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero -  
Wateraftaansluiting 2"

# INDIRECT GAS BOILING PAN 150lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356119

MODELLO  
Q90PF/GI150S

SERIE  
QUEEN 9

## PRODUCT'S RANGE PLUS



Indirect pots with automatic cavity  
condensate drain valve  
The valve has a dual function  
- recharges the pressure inside the  
interspace  
- allows automatic water  
condensate discharge



Stainless steel tank with aisi 316  
bottom



Possibility of hot or cold water  
loading

# INDIRECT GAS BOILING PAN 150lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356119

MODELLO  
Q90PF/GI150S

SERIE  
QUEEN 9

## ACCESSORIES

| CODE       | MODELLO      | DESCRIZIONE                                                         |
|------------|--------------|---------------------------------------------------------------------|
| MA97347000 | <b>9C5</b>   | COLANDER BASKET                                                     |
| MA97348000 | <b>9CV5</b>  | VEGETABLE STRAINER BASKET FOR POT                                   |
| MA97350900 | <b>9C10</b>  | COLANDER BASKET                                                     |
| MA97351000 | <b>9C15</b>  | COLANDER BASKET                                                     |
| MA97352000 | <b>9CV10</b> | VEGETABLE STRAINER BASKET FOR POT                                   |
| MA97353000 | <b>9CV15</b> | VEGETABLE STRAINER BASKET FOR POT                                   |
| MA97354000 | <b>9-I10</b> | FUNNEL FOR POT DISCHARGE                                            |
| MA97355000 | <b>9-I15</b> | FUNNEL FOR POT DISCHARGE                                            |
| MA97349000 | <b>9-I5</b>  | POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM            |
| OKWLI      | <b>OKWLI</b> | OPTIONAL - automatic cavity water-loading kit for indirect cookware |