

Nozzles



Snowy Fir Jet



WIND RESISTANCE					
SPLASH					
NOISE LEVEL					
VISIBILITY					
WATER APPEARANCE	VERY FOAMY				
WATER LEVEL DEPENDENT					
FLOW STRAIGHTENER VANE	*				
BALL JOINT/SWIVEL FLANGE	*				

* Depending on model



Snowy Fir Jets must be installed on a determined height due to their water level dependency.

Stream height will increase if water levels fall (reducing its diameter), stream height will decrease if when water levels rise. If water wave is not avoided these jets will have continuous stream fluctuation.



TECHNO WATER DESIGNS

The Art of Water

Design Studio & Workshop • Unit 4, 33 Jade Drive Molendinar 4214

Ph • +617 5597 5882

E • info@techno-waterdesigns.com.au

W • www.techno-waterdesigns.com.au


SNOWY FIR JET

Reference	SFJ 91209	SFJ 91007	SFJ 91503	SFJ 92008	SFJ 92504
-----------	-----------	-----------	-----------	-----------	-----------

Connection	G ½" M	G 1" M	G 1½" H	G 2" H	G 2½" H
Outlet Ø	25 mm	50 mm	65 mm	75 mm	107 mm

Jet height m	Q	P	Q	P	Q	P	Q	P	Q	P
	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.	L/min	m.c.a.
0,50	19	6,0	86	7,60	121	10,0	148	8,0	248	6,0
0,75	22	7,5	96	11,50	150	15,5	180	13,5	320	9,0
1,00	25	9,0	104	15,00	175	20,0	205	17,0	350	11,0
1,50	28	11,0	118	20,90	212	26,5	238	25,0	425	15,0
2,00			130	26,50	232	34,0	260	31,0	495	18,5
2,50			140	31,00	245	39,5	275	37,0	555	22,0
3,00			148	35,00	255	44,0	290	43,0	603	25,0
4,00					265	53,0	310	52,0	690	30,0
5,00					275	99,0	325	61,0	780	35,0
6,00							335	64,5	850	38,0
7,00							340	75,0	920	42,0
8,00							345	82,0	990	46,0
9,00							347	85,0	1050	49,0
10,00									1110	51,5
11,00									1160	54,0
12,00									1200	56,0
13,00									1260	57,0
14,00									1298	58,0

Material	Brass	Brass	Brass	Brass	Brass
Weight kg	0,37	0,96	2,90	4,70	10,80
Flow straightener vane	1	1	—	—	—
Angle α	15°	19°	8°	8°	8°

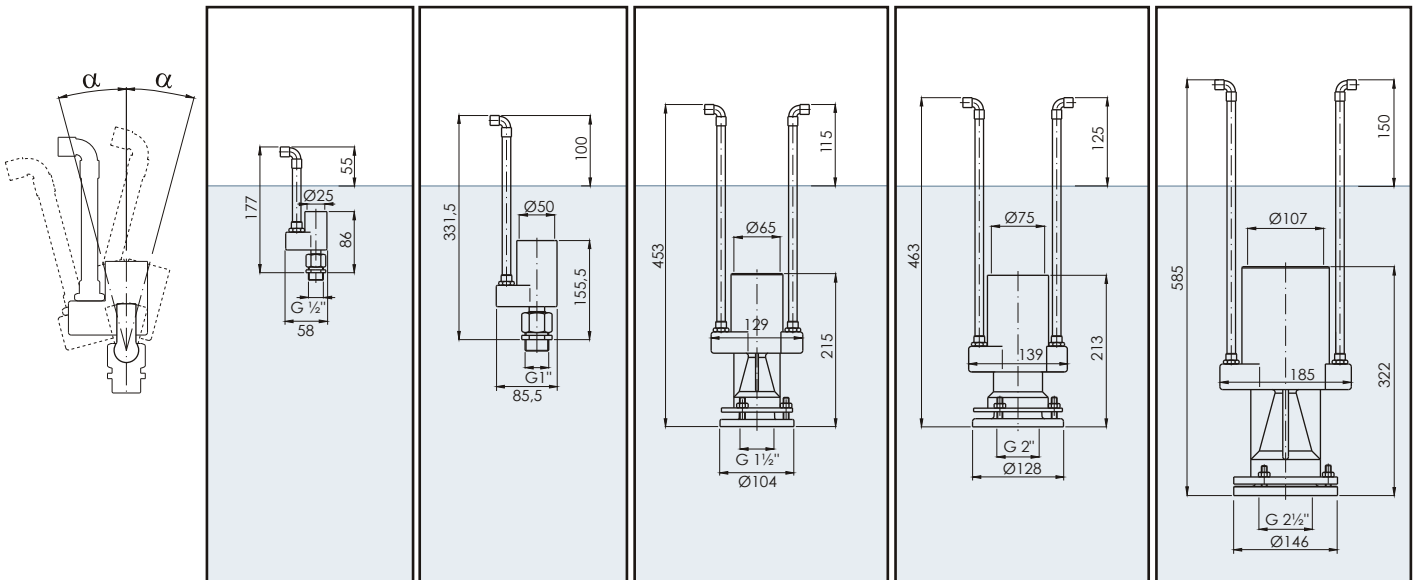

Q: Flow P: Pressure M: Male H: Female L/min: litres/minute m.c.a.: metre head 10 m.c.a.= 1 BAR Measures in mm.

CHROME OPTION: SAME REFERENCE NUMBER ENDING WITH "C"