

Frymaster's FootPrint® PRO Filtration System is designed to extend the useful life of oil, while ensuring quality fried products. It is engineered with features that allow convenient use, easier servicing and the ability to use three different filter mediums with one pan.

This unit utilises gravity to drain oil into the filter pan leaving drain lines free of residual oil.

The filter, housed beneath two or more FootPrint-ready gas fryers, filters fryers, individually, without filter movement from fryer to fryer. 25 Litres of oil can be filtered in about three minutes, while other fryers in the battery continue cooking.

FootPrint® PRO Filtration System is suitable for fryers with a maximum capacity of 25L.

**STANDARD FEATURES**

- 3 x MJ150 fryers. 75L total oil capacity.
- Large capacity filter pan design is light weight for easy removal
- Filter pan designed on rails to clear floor mats
- Ample cleaning space when filter pan is removed
- Space saving, Convenient, Labour Saving
- Increased diameter on oil pick-up tube prevents clogging
- Stainless steel construction
- 1/3 H.P. motor
- 1 box of 25 prepackaged applications of Filter powder
- 1 box of 25 sheets Filter paper
- Stainless steel crumb tray
- Castors
- Covers


**OPTIONAL FEATURES**

- Computer Controller
- External oil discharge, specify front or rear
- Spreader cabinet
- Food warmer holding cabinet
- Flexible gas hose with quick disconnect and restraining kit
- Automatic basket lifters



FMJ250C shown

<b>DIMENSIONS</b>
External: 1190W x 800D x 1211H mm
FPP Filter only: 317W x 647D x 406H mm
Clearance: Sides and rear 152mm, Front 610mm (from combustible walls)
Net Weight: 268kg
<b>TECHNICAL DATA</b>
Gas Type: Natural or Propane
Total Output: 330MJ
Gas Connection: 1"
Power Supply: 230/240V, 50Hz, 4.5amp (Cord & Plug provided)
Drain Height: 269mm
<b>PRODUCTION CHIPS FROM FROZEN</b>
108kg per hour
<b>CONTROLLER AS STANDARD</b>
Digital Controller
<b>SHIPPING DATA</b>
Shipping Weight: 298kg
Shipping Dimensions: 1359W x 113D x 1372H mm
<b>AGA Approval</b>
AGA 7943 G

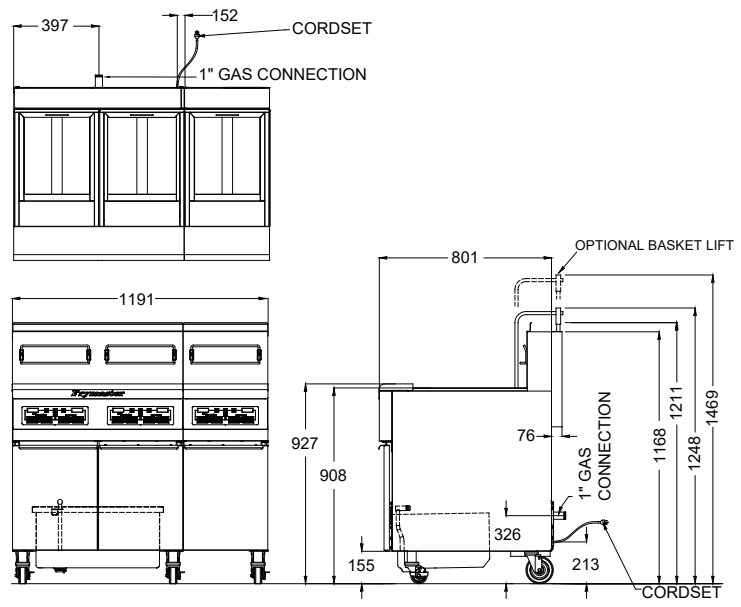

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4699  
[www.comcater.com.au](http://www.comcater.com.au)

**Melbourne**  
96-100 Tope Street  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 3 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

**Perth**  
Unit 16, 7 Abrams Street  
Balcatta, WA 6021  
Tel: +61 8 6217 0700  
Fax: +61 8 6217 0799