

Shower Mixer

INSTALLATION INSTRUCTIONS

Care and Maintenance

The materials and workmanship of the tapware is of high quality and in order to maintain its appearance, it is important not to wipe with abrasive cleaners. Cleaning of this product should only be done with warm soap water on a regular basis.

Working Specifications

Maximum : Temperature - 80°C
Pressure - 500kpa

Where normal working pressures exceed the maximum stated above, pressure limiting valve should be installed as excessive pressure may damage the tap and void warranty.

Minimum : Temperature - 1°C
Pressure - 150 kpa

Recommended operating pressure: 150 to 500kpa.


NOTE:

This mixer must be installed with isolating stop taps in accordance with local authority installation codes. All Abey mixers must be installed by a licensed plumber, failure to do so may void warranty. All Abey tapware must be installed in accordance with AS/NZS 3500 series.

Notice


- 1 All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow.
- 2 Aerator insert housing must be retightened to prevent removal by hand.
- 3 When installing parts with concealed O-rings (such as cover plate or connector), apply soapy water or plumber-specific grease to the surface of the O-ring for lubrication first.

Mixer without diverter: 51mm to 74mm

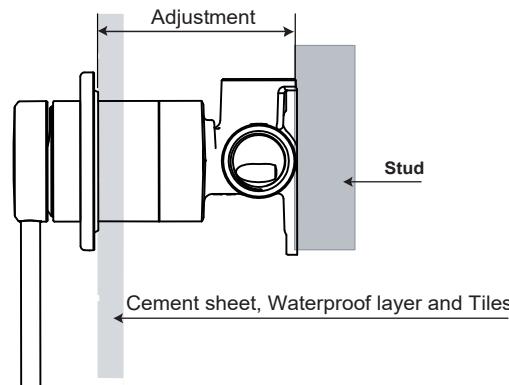


1

Screw the shower mixer set in place

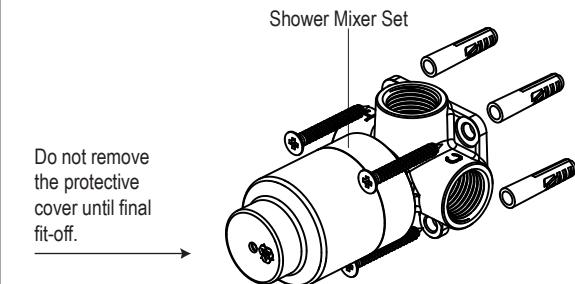


2

Attach water supply and water outlet
TEST AND CHECK FOR LEAKS

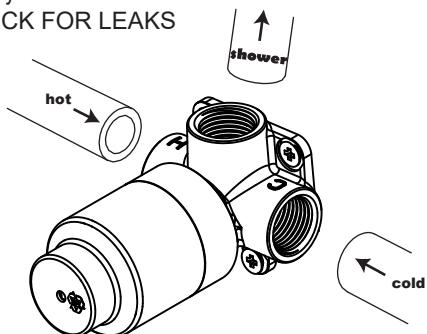


3

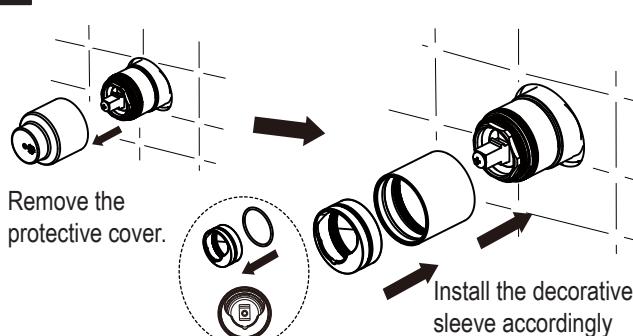

4


Push on the cover plate.

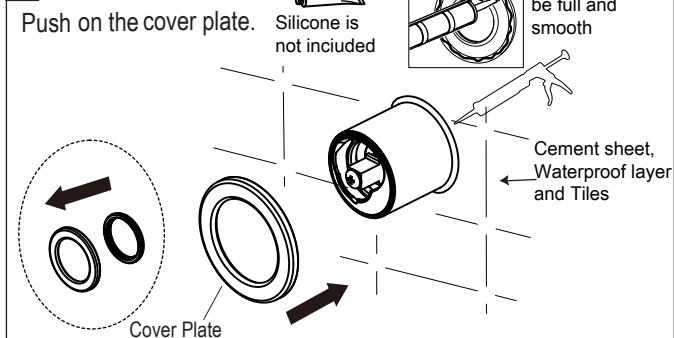

5A For One Piece Handle

Push on the mixer handle and tighten with the grub screw.

Fit the cap in place.
(if purchased product come with a cap)

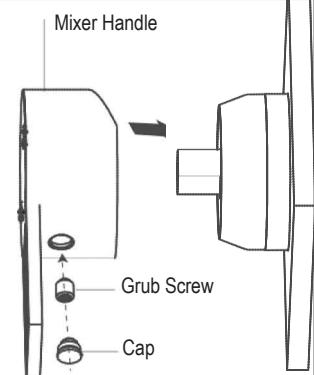

5B For Pin Lever Handle

Push on the mixer handle and tighten with the grub screw.

Screw the pin lever in place.

