

INSTALLATION INSTRUCTIONS

Care and Maintenance

The materials and workmanship of the tapware is of high quality and in order to maintain its appearance, it is important not to wipe with abrasive cleaners. Cleaning of this product should only be done with warm soap water on a regular basis.

Working Specifications

Maximum : Temperature - 80°C
Pressure - 500kpa

Where normal working pressures exceed the maximum stated above, pressure limiting valve should be installed as excessive pressure may damage the tap and void warranty.

Minimum : Temperature - 1°C
Pressure - 150 kpa
Recommended operating pressure: 150 to 500kpa.


NOTE:

This mixer must be installed with isolating stop taps in accordance with local authority installation codes. All Abey mixers must be installed by a licensed plumber, failure to do so may void warranty. This tap is manufactured to standard AS/NZS 3718. All Abey tap ware must be installed in accordance with AS/NZS 3500 series.

Notice

- 1 All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow .
- 2 Aerator insert housing must be retightened to prevent removal by hand.


Mixer with diverter: 45mm to 70mm

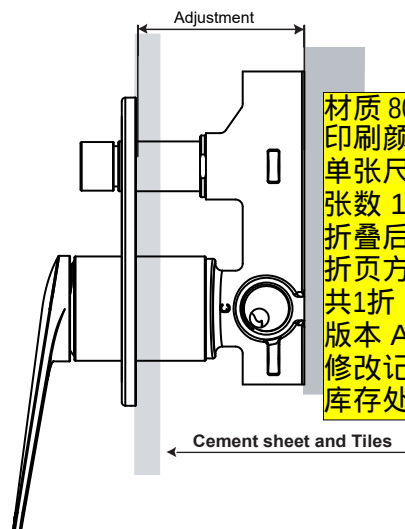

材质 80g双胶纸
印刷颜色 正面单黑
单张尺寸(mm) 297x210
张数 1
折叠后尺寸(mm) 148.5x210
折页方式 对折
共1折
版本 A
修改记录 -
库存处理方式 -


1

Attach water supply and water outlet.
TEST AND CHECK FOR LEAKS

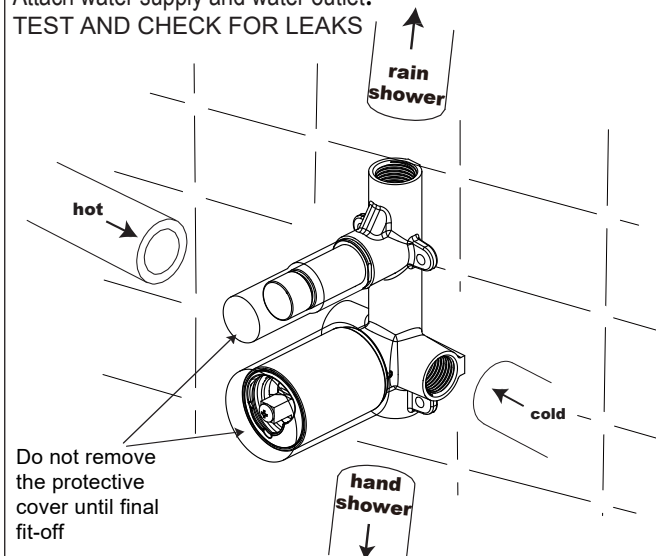


2

Screw the diverter shower mixer set in place.

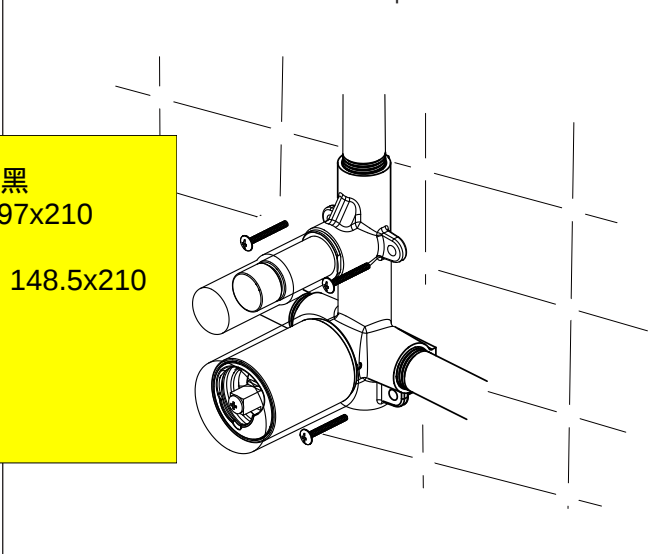


3

Remove the protective cover.
And push on the cover plate.

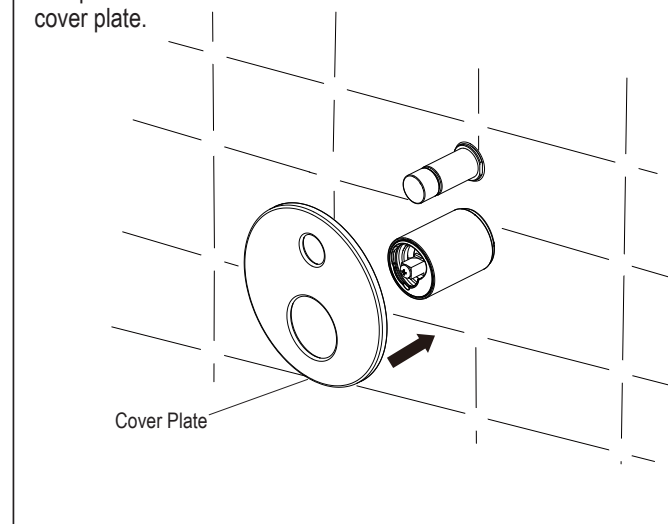

4

Push on the mixer handle and tighten with the grub screw.

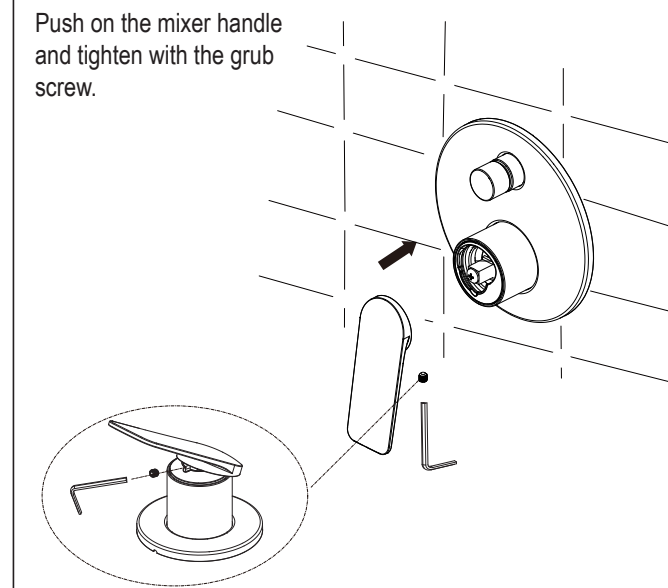

Abey^{AU}

Abey Australia Pty Limited
57-81 Abey Road
Cobblebank 3338
PHONE: 03 9747 7777