



Side A and B







Side A




Side B


SAINTE 08

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

- type:** suspension
- construction:** aluminum polished light block and ceiling anchors
laminated glass body
nylon ribbon
PMMA frosted diffuser
- specifications:** source: LED array, integrated
power consumption: 11 W
colour temperature 2700k, 3000k, dim to warm.
see order guide
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
refer to our recommended list of dimmer models
- ribbon length:** 20' / 610 cm, width: 2" / 5 cm
- weight:** 42.1 lb / 19.1 kg
- certifications:**     IP20
- warranty:** 2 years




Canopy
W: 5" / 12.7 cm
L: 7" / 17.8 cm
H: 1.7" / 4.3 cm

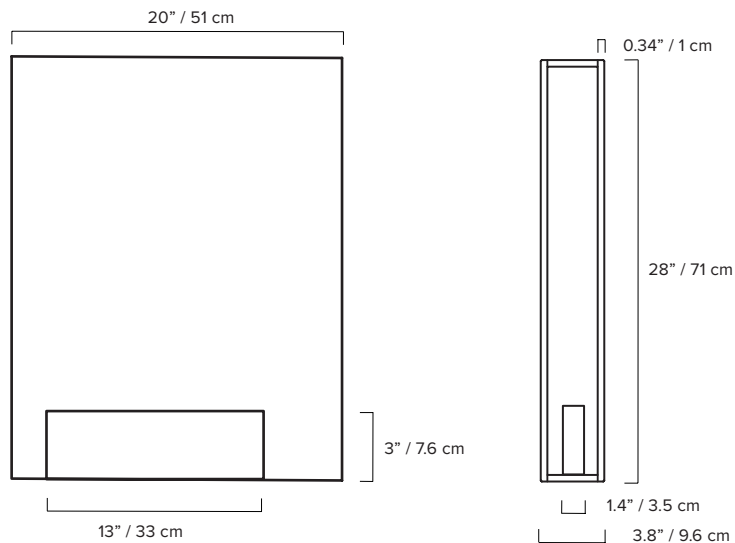


*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	GLASS BODY (Side A and Side B)	
STE	sainte	08	YEDY yellow, dark yellow
			LGLG laminated green, laminated green
			MDMD medium grey, medium grey
			DRFB dark red, frosted blush
			LPFG light peach, frosted grey
			*CC custom colour
STE	08	YEDY	

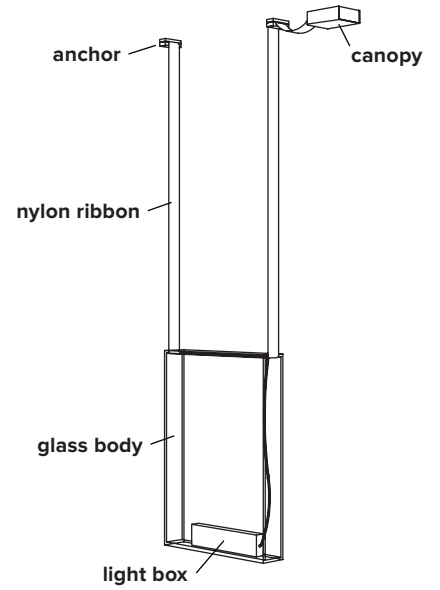

NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)	CONTROL
BK black	BK black	WL warm light (2700K)	ZT 0-10V dimming
	WH white	NL neutral light (3000K)	OT 1-10V dimming
		D27 dim to warm (2700K to 2200K)	PH phase dimming
		D30 dim to warm (3000K to 2200K)	
		V variable	
BK	BK	WL	ZT = STE08YEDYBKBKWLZT
			example




GLASS BODY (*Custom colours available upon request)



NYLON RIBBON



MOUNTING OPTIONS

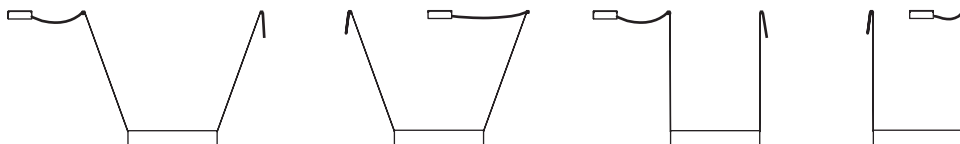

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

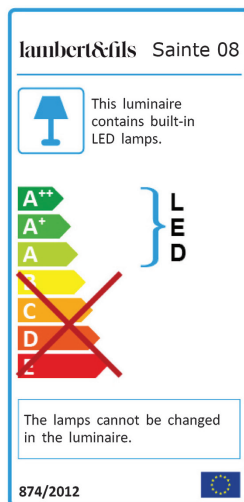

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions