

## THE COMPACT DEVICE THAT DELIVERS ON QUALITY AND EFFICIENCY.

The imageRUNNER ADVANCE DX C357i Series are ideally suited to mid-sized businesses that need access to efficient, high-quality printing.

### Canon imageRUNNER ADVANCE DX C357i Series

 Colour Multifunction Device



#### PERFORMANCE

**Save time and resources with increased workflow productivity**

- Intuitive, user-friendly interface with a large 10.1 inch WSVGA touchscreen and smartphone similarities.
- Advanced scanning technology can dramatically reduce time spent naming and saving scanned files to your cloud storage service\*.
- Single-pass document feeder and automatic blank page removal for streamlined digital workflows.
- Hot Folders allow users to drag and drop a file into a hot folder and automatically print with pre-defined settings such as number of copies and finishing requirements.
- Scan and convert documents to searchable digital files in a variety of file formats.



#### COST CONTROL

**Improving operation efficiencies and better managing costs**

- Forced job hold with ability to change print settings at device enhances control over projects.
- Blank page removal eliminates paper wastage and helps with document formatting.
- Standard User Login Manager helps track and control user access.



#### INTEGRATION

**Seamlessly integrate with key line-of-business systems to fast track your digital transformation journey.**

- Personalised workflows allow users to pick and choose what works best for them in terms of functionality.
- IT and office automation smoothly aligns thanks to a common source code for firmware and Canon's powerful Multifunctional Embedded Application Platform (MEAP).
- Access and store your cloud documents at anytime using uniFLOW Online.



#### MOBILITY

**Workers and contractors can achieve ultimate freedom and flexibility with Expanded Mobile OS Support**

- Mobile workflows are set up with built in Wi-Fi and mobile applications to easily allow users to connect, print, scan and capture using Canon PRINT Business.
- Full support for Apple® Airprint® and Android™ Mopria™ Mobile Printing.
- Simple and easy mobile connectivity with in-built Wi-Fi plus options to connect through Bluetooth and Near Field Communication (NFC).



#### SECURITY

**Safeguard data and ensure sensitive information remains secure**

- The device boot process, firmware, and applications are verified upon start up. In conjunction with McAfee Embedded Control™ which utilises a whitelist to protect against malware, the device is protected from tampering or alterations of firmware and applications.
- Standard HDD encryption is applied for tighter control over confidential documents and hardware data.
- Simplified management and security settings provides users and administrators with the ability to control security policies with ease from a centralised point.



#### SUSTAINABILITY

**Achieve environmental goals by incorporating responsible design and efficient operations**


- Motion Sensor and Sleep Recovery Triggers reduce energy consumption.
- Minimise waste with default print settings including 2-sided, and black and white options.
- A combination of fusing technologies and low-melting-point toner minimises power requirements and helps achieve low energy consumption.

\* Requires uniFLOW Online Express, Online or Cloud Image Processing subscription.

## ADVANCED SCANNING

uniFLOW Online's Filing Assist\* saves you time, reduces keying errors and brings consistency to your filing so you can find what you need, when you need it, anywhere you have internet access; at home, work or on the go.

Filing Assist uses pre-configured workflows that scan batches of repetitive documents including invoices, delivery notes, picking lists and orders to popular cloud services. Not only are they scanned, they are named, converted and filed – based on rules and information from the document.

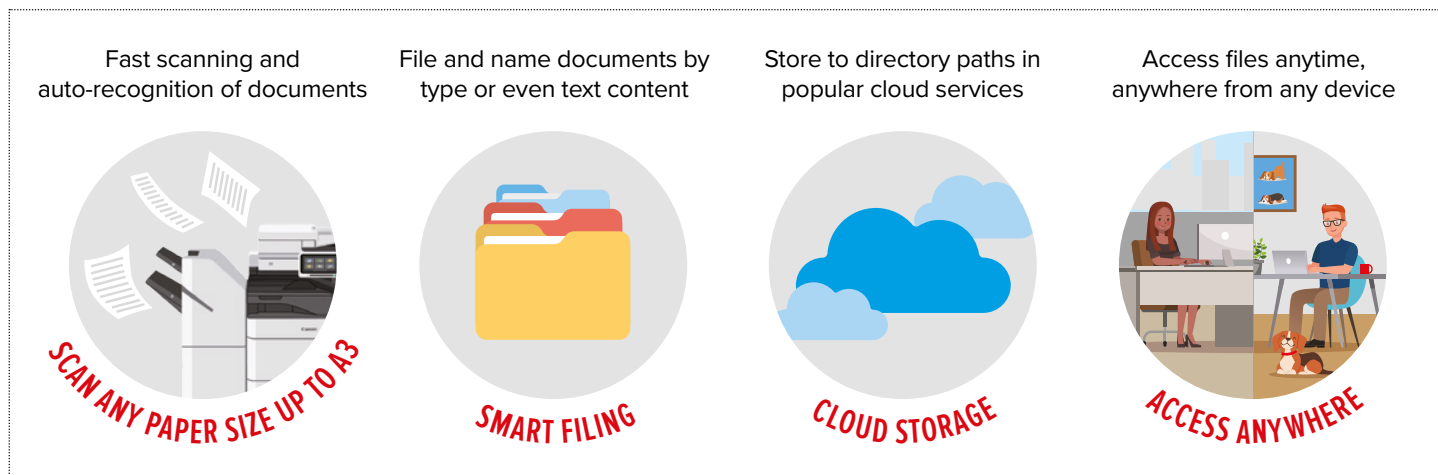

\* Filing Assist is available with uniFLOW Online 2020.2 and requires a Cloud Image Processing subscription.

## CONFIGURATION



# imageRUNNER ADVANCE DX C257i/C357i Series SPECIFICATIONS

imageRUNNER  
ADVANCE DX

Main Unit	
Machine Type	A4 Colour Laser Multifunctional
Core Function	Print, Copy, Scan, Send, Store and Optional Fax
Processor	175GHz Dual Core Processor
Control Panel	10.1" TFT LCD WSVGA Colour Touch Panel
Memory	Standard: 3.0 GB RAM
Hard Disk Drive	Standard*: 320 GB (available disk space: 250 GB) * A different initial HDD may be used.
Interface Connection	Network: Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy Others: Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device) Optional: Serial Interface, Copy Control Interface
Paper Supply Capacity (A4, 80 gsm)	Standard: 650 Sheets 100-sheets Multi-purpose Tray 550-sheets Paper Cassette x 1 Maximum: 2,300 Sheets (with Cassette Feeding Unit-AK1)
Paper Output Capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 500 Sheets (with Staple Finisher-Z1)
Finishing Capabilities	Standard: Collate, Group With Finisher: Collate, Group, Offset, Staple
Supported Media Types	Multi-purpose Tray: Thin, Plain, Heavy, Recycled, Colour, Transparency, Pre-punched, Bond, Label, Envelope Paper Cassette: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond, Envelope
Supported Media Sizes	Multi-purpose Tray: Standard Size: A4, A5, A5R, A6, B5, Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope Custom Size: 98.0 x 148.0 mm to 216.0 x 355.6 mm Paper Cassette: Standard Size: A4, A5, A5R, A6, B5 Custom Size: 98.0 x 190.5 mm to 216.0 x 355.6 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5
Supported Media Weights	Multi-purpose Tray: 60 to 220 gsm Cassettes: 60 to 163 gsm Duplex: 60 to 163 gsm
Warm-up Time	Quick Startup Mode: 4 seconds or less* * Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Deep Sleep Mode: 10 Seconds or less From Power On: 10 Seconds or less* * Time from device power-on, until copy ready (not print reservation).
Dimensions (W x D x H)	Standard: 519 x 658 x 638 mm
Installation Space (W x D)	Basic: 852 x 908 mm (with Multi-purpose Tray extended + Paper Cassette open) Fully Configured: 1,407 x 908 mm (with Staple Finisher-Z1 + Multi-purpose Tray extended + Paper Cassette open)
Weight	Approx. 49 kg (including toner)
Print Specifications	
Print Speed*	IR-ADV DX C357i: Up to 35 ppm (A4), Up to 26 ppm (A5R), Up to 61 ppm (A5), Up to 23 ppm (A6) IR-ADV DX C257i: Up to 25 ppm (A4), Up to 26 ppm (A5R), Up to 46 ppm (A5), Up to 23 ppm (A6) *1-sided.
Print Resolution (dpi)	1,200 x 600
Page Description Languages	Standard: UFR II, PCL6, Adobe® PostScript® 3™
Direct Print	Supported File Types: TIFF, JPEG, PDF, EPS, and XPS
Printing from Mobile and Cloud	AirPrint®, Mopria™, Google Cloud Print™, Canon Business PRINT, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, 2-sided Printing, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System As of Feb. 2020	UFR II: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X (10.9 or later)
Copy Specifications	
Copy Speed* (BW and CL)	IR-ADV DX C357i: Up to 35 ppm (A4), Up to 26 ppm (A5R), Up to 61 ppm (A5), Up to 23 ppm (A6) IR-ADV DX C257i: Up to 25 ppm (A4), Up to 26 ppm (A5R), Up to 46 ppm (A5), Up to 23 ppm (A6) *1-sided
First-Copy-Out Time (A4, BW/CL)	IR-ADV DX C357i: Approx. 51/6.9 seconds or less IR-ADV DX C257i: Approx. 6.9/9.4 seconds or less
Copy Resolution (dpi)	600 x 600, 300 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable Zoom: 25% to 400% (1% Increments) Preset Reduction/Enlargement: 25%, 50%, 70%, 81%, 86%, 100% (1:1), 115%, 122%, 141%, 200%, 400%
Copy Features	Preset R/E Ratios by Area, 2-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, 2-sided Original, Job Build, N on 1, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Copy ID Card, Skip Blank Pages, Colour Mode, Reserved Copy, Copy Sample
Scan Specifications	
Standard type	Single-pass Duplexing Automatic Document Feeder* (2-sided to 2-sided (Automatic)) * Detect Feeder Multi Sheet Feed is supported.
Document Feeder Paper Capacity (80 gsm)	Up to 100 Sheets
Acceptable Originals and Weights	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder Media Weight : 1-sided scanning: 42 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Note: Business card: 80 to 220 gsm Original width narrower than A6 except business card: 50 to 128 gsm.
Supported Media Sizes	Platen Max. Scanning Size: Up to 216.0 x 355.6 mm Document Feeder Media Size: A4, A5R, A6, B5 Custom Size: 48.0 x 128.0 mm to 216.0 x 355.6 mm Business Card: 48.0 x 85.0 mm to 55.0 x 91.0 mm
Scan Speed (ipm, BW and CL: A4)	Send (300 x 300 dpi): Automatic Colour Select "OFF": 1-sided Scanning: 95 2-sided Scanning: 190 Automatic Colour Select "ON": 1-sided Scanning: 50 2-sided Scanning: 100 Copy: Scan Speed Priority (300 x 600 dpi): 1-sided Scanning: 50 2-sided Scanning: 100 Image Quality Priority (600 x 600 dpi): 1-sided Scanning: 30 2-sided Scanning: 50

Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Pull Scan Specifications As of Feb. 2020	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Box, Scan to Network, Scan to USB Memory Key, Scan to Mobile Devices, Scan to Cloud (uniFLOW Online)
Send Specifications	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax
Address Book	LDAP (2,000)/Local (1,600)/Speed Dial (200)
Send Resolution (dpi)	Push: Up to 600 x 600 Pull: Up to 600 x 600
Communication Protocol	File: FTP (TCP/IP), SMB 3.0 (TCP/IP), WebDAV E-mail/Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF (Compact, Apply Policy, Optimise for Web, PDF A/1-b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, 2-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages
Fax Specifications	
Maximum Number of Connection Lines	2
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	A4, A5*, A6*, B5*/A4, A5, B5 * Sent as A4.
FAX Memory	Up to 30,000 pages (2,000 Jobs)
Speed Dials	Max. 200
Group Dials/Destinations	Max. 199 Dials
Sequential Broadcast	Max. 256 Addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log
Store Specifications	
Mail Box (Number Supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 Jobs) Stored
Advanced Box	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB: 64, WebDAV: 3
Advanced Box Available Disc Space	Standard: 16 GB
Advanced Box Features	Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to Public, URI TX, Backup/Restore
Security Specifications	
Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print™), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) *1 Requires uniFLOW Online/uniFLOW.
Network Security	TLS 1.3, IPsec, IEEE802.1X Authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send Virus Concerns for E-mail Reception
Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialise, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection)
Device Management and Auditing	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
Environmental Specifications	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220-240 V, 50/60 Hz, 3.9 A
Power Consumption	Maximum: 1,500 W Standby: Approx. 40.3 W*1 Sleep Mode: Approx. 0.8 W*2 *1 Reference Value: Measured one unit. *2 0.8 W Sleep mode is not available in all circumstances due to certain settings.
Consumables	
Toner Cartridges	NPG-76 Toner BK/C/M/Y
Toner (Estimated Yield @ 5% Coverage)	NPG-76 Toner BK: 23,000 Pages NPG-76 Toner C/M/Y: 18,000 Pages
Software and Printer Management	
Tracking and Reporting	Universal Login Manager (ULM) uniFLOW Online Express
Remote Management Tools	eMaintenance Content Delivery System
Scanning Software	Network ScanGear
Optimisation Tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)
Paper Supply Options	
Cassette Module-AE1	Paper Capacity: 550 Sheets (80 gsm) Paper Type: Thin, Plain, Heavy, Recycled, Colour, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom Size: 98.0 x 190.5 to 216.0 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 159 mm (attached to the main unit) Weight: Approx. 10 kg
Cassette Feeding Unit-AK1	Paper Capacity: 550 Sheets (80 gsm) x 3 cassettes Paper Type: Thin, Plain, Recycled, Heavy, Colour, Pre-punched, Bond Paper Size: A4, A5R, B5 Custom Size: 98.0 x 190.5 mm to 216.0 to 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 511 x 508 x 425 mm (attached to the main unit) Weight: Approx. 19 kg

Output Options*	* Paper capacity may vary with different paper type/size.
Staple Finisher-Z1	Tray Capacity (with 80 gsm paper/same paper type): A4, A5, A5R, A6, B5: 500 sheets Paper Weight: 60 to 220 gsm Staple Position: Corner Staple Capacity: A4, B5: 30 sheets (60 to 105 gsm) Power Source: From the Main Unit Dimensions (W x D x H): 555 x 459 x 301 mm (Unit size) Weight: Approx. 14 kg
System and Controller Options	
Print Accessories	PCL International Font Set-A1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Copy Control Interface Kit-A1, Connection Kit-A2 for Bluetooth LE, NFC Kit-E1, Serial Interface Kit-K3
FAX Accessories	Super G3 FAX Board-AT1, Super G3 2nd Line Fax Board-AT1, Remote Fax Kit-A1, IP Fax Expansion Kit-B1
Other Options	
Accessibility Accessories	ADF Access Handle-A1
Staple Cartridge	Staple-P1



POWERED BY



Canon Australia Pty Ltd  
 1800 444 199  
[canon.com.au/business](https://canon.com.au/business)  
 Canon New Zealand Ltd  
 0800 222 666  
[canon.co.nz/business](https://canon.co.nz/business)