

# INDIRECTLY HEATED ELECTRIC BOILING PAN - 150 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356159

MODELLO  
Q90PF/EI150S

SERIE  
QUEEN 9

## GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with a thickness of 2 mm.

AISI 304 stainless steel tanks with AISI 316 bottom.

Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

Frontal drain by means of 2" chrome-plated brass faucet.

Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).

Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.

Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Stainless steel tank with aisi 319 bottom

Possibility of hot or cold water loading

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# INDIRECTLY HEATED ELECTRIC BOILING PAN - 150 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356159

MODELLO  
Q90PF/EI150S

SERIE  
QUEEN 9

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356159
DEFINITION	Q90PF/EI150 S PEN.ELE M80 IND.C/VAL 150L
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	165.5 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	1070 mm
PACKAGE WIDTH	840 mm
PACKAGING HEIGHT	1240 mm
PACKAGE VOLUME	1,115 m3
GROSS PACKING WEIGHT	175.5 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	21 kW
IP GRADE	IPX5
CAPACITY	150 litri
CERTIFIED MODEL	Q90PF/EI150

# INDIRECTLY HEATED ELECTRIC BOILING PAN - 150 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....






CODICE  
CR1356159

MODELLO  
Q90PF/EI150S

SERIE  
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -  
ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEREN IN mm

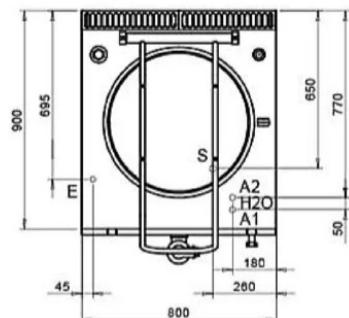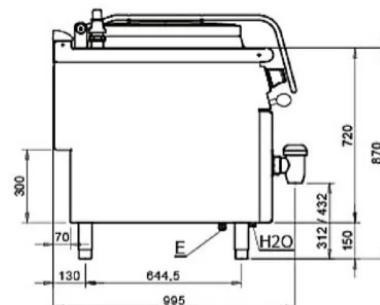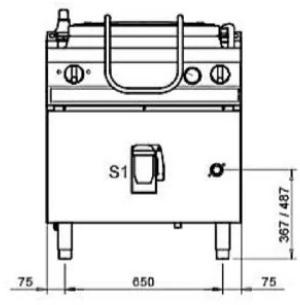

Q90PF/EI...

## Legenda - Legende - Key - Légende - Leyenda - Legenda

- H20 Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Watersansluiting  
A1 = Calda - Heiss - Warm - Chaude - Calenta - Warm EN ISO 228-1 G 3/4  
A2 = Fredda - Kalt - Could - Froid - Fría - Koude EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica - Spannbuchse - Electric cable stress relief  
Presse étoupe de câble él. - Elektrische kabelwartel
- S Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain -  
Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte EN ISO 228-1 G 1
- S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero -  
Waterafvoer 2"

## INDIRECTLY HEATED ELECTRIC BOILING PAN - 150 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356159

MODELLO  
Q90PF/EI150S

SERIE  
QUEEN 9

# PRODUCT'S RANGE PLUS



Indirect pots with automatic cavity condensate drain valve  
The valve has a dual function  
- recharges the pressure inside the interspace  
- allows automatic water condensate discharge



Stainless steel tank with aisi 316 bottom



Possibility of hot or cold water loading

# INDIRECTLY HEATED ELECTRIC BOILING PAN - 150 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356159

MODELLO  
Q90PF/EI150S

SERIE  
QUEEN 9

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	<b>9C5</b>	COLANDER BASKET
MA97348000	<b>9CV5</b>	VEGETABLE STRAINER BASKET FOR POT
MA97350900	<b>9C10</b>	COLANDER BASKET
MA97351000	<b>9C15</b>	COLANDER BASKET
MA97352000	<b>9CV10</b>	VEGETABLE STRAINER BASKET FOR POT
MA97353000	<b>9CV15</b>	VEGETABLE STRAINER BASKET FOR POT
MA97354000	<b>9-I10</b>	FUNNEL FOR POT DISCHARGE
MA97355000	<b>9-I15</b>	FUNNEL FOR POT DISCHARGE
MA97349000	<b>9-I5</b>	POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM
OKWLI	<b>OKWLI</b>	OPTIONAL - automatic cavity water-loading kit for indirect cookware